

DS-PEA4H-20 **Emergency Intercom Main Station**




- 10.1-inch color IPS touchscreen with 1280*800 resolution.
- Equipped with hardware noise suppression and echo cancellation, ensuring clear and bright call quality.
- Supports video intercom with alarm boxes.
- Supports real-time preview of audio and video from front-end devices.
- Receives and displays alarm information from front-end devices in real time.
- Supports group broadcasting to front-end devices; Capable of broadcasting to 50 devices simultaneously.
- Includes web management functionality for parameter configuration, device management, system maintenance, and other operations.

▪ Specification

System parameters	
Operation system	Android
ROM	8 GB
RAM	2 GB
Display parameters	
Screen size	10.1-inch
Operation method	Capacitive touch screen
Type	Colorful IPS
Resolution	1280*800
Video parameters	
Lens	/
Resolution	2 MP
Wide dynamic range (WDR)	/
Supplement light	/
Video standard	Main stream: H.264; Sub-stream: H.264
Capacity	
Linked panic alarm device capacity	250
Network parameters	
Network protocol	SIP
Wi-Fi	Support
Device interfaces	
Alarm input	2
Network interface	1
RS-485	1
USB	Support
TF card	Support
Alarm output	2
General	
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	292 mm × 166 mm × 31 mm
Battery	/
Application environment	indoor
Power consumption	≤ 12 W
Language	English
Power supply	12 VDC, 1 A, Standard PoE, af

▪ Dimension

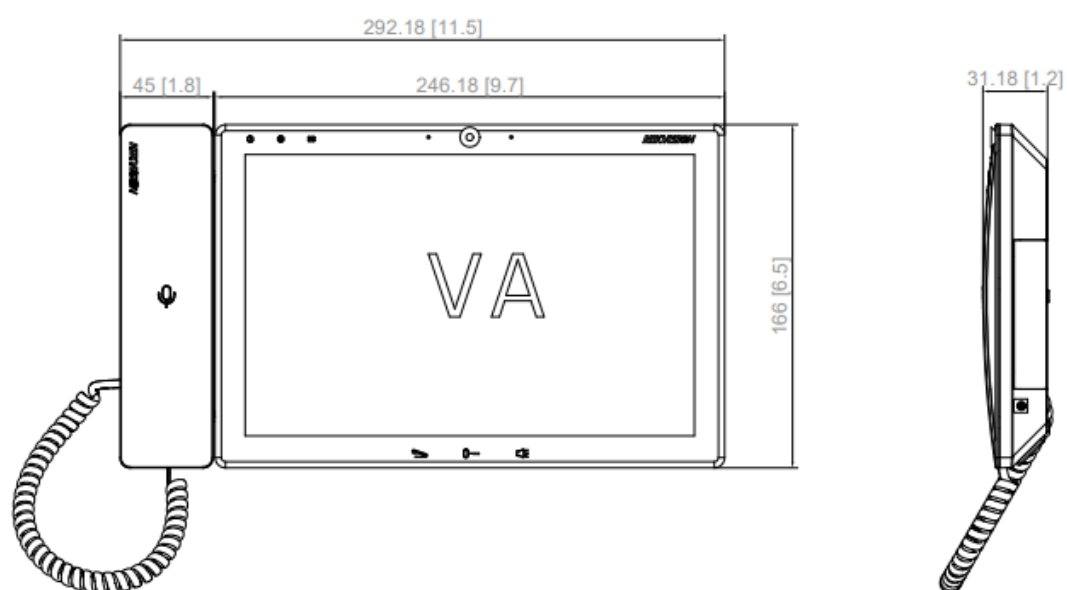

Unit:mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

