

DHI-ISC-M100-EC15

Extension Roller Table, 1.5m



- Removable safety roller.
- Stainless steel roller.
- Supports cascade connection between extension conveyors.
- High-strength frame, maximum load is 250 kg.
- Supports installation at the entrance or exit of the security screening machine.

System Overview

Security Screening Machine Specific Extension Roller Table.
It is suitable for the security screening machine with the tunnel of 100cm width, such as DHI-ISC-M100100 or DHI-ISC-M100100D.

Scene

Suitable for baggage security screening inspection in airport, railway station, bus station, metro, rail transit, government building, exhibition center, large events and more.

Technical Specification

General parameters


Max. Load	250 kg (551.16 lb), evenly distributed
Roller Table Length	1000 mm (39.37")

Regular Parameters

Roller Material	Stainless steel
Roller Diameter	50 mm (1.97")
Load of Single Roller	70 kg (154.32 lb)
Roller Distance	55 mm (2.16")
Conveyor Height	285 mm–315 mm (11.22"–12.40")
Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)
Operating Humidity	<95% (RH), non-condensing
Product Dimensions	1500 mm × 1007 mm × 300 mm (59.06" × 39.65" × 11.81")
Packaging Dimensions	1635 mm × 1150 mm × 495 mm (64.37" × 45.28" × 19.49")
Net Weight	95 kg (209.44 lb)
Gross Weight	140 kg (308.65 lb)
Installation	Ground mount

Ordering Information		
Type	Model	Description
Extension Roller Table	DHI-ISC-M100-EC15	Extension Roller Table, width 100cm , length 1.5m

Installation

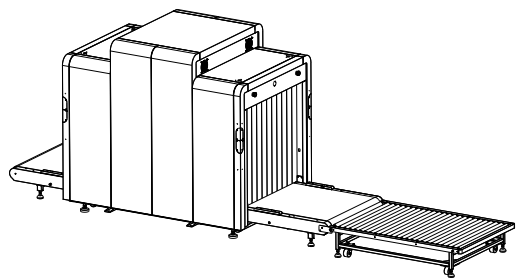

Dimensions (mm[inch])

