


DS-KD-E/AC EM Card Reader Module

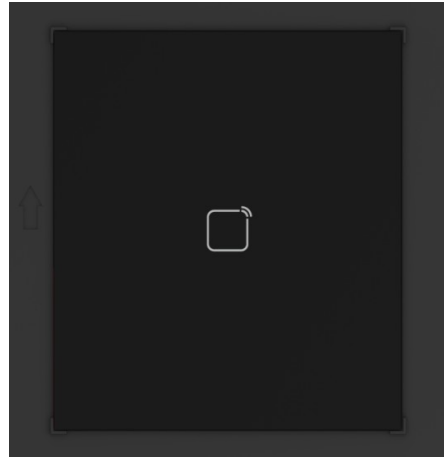

- EM card reader module of modular door station
- Support unlock door via swiping card, issuing cards
- IP65 protection level
- Backlight compensation behind the module
- Easy to use and extend

▪ Specification


System parameters	
Operation system	Linux
ROM	/
RAM	/
Processor	Embedded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Supplement light	/
Video compression standard	/
Audio parameters	
Audio input	/
Audio compression standard	/
Audio output	/
Audio compression bitrate	/
Audio quality	/
Volume adjustment	/
Capacity	
User capacity	/
Face capacity	/
Card capacity	/
Linked network camera capacity	/
Network parameters	
Network protocol	/
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	/
Network interface	/
TAMPER	/
Exit button	/
RS-485	1
USB	/
Wiegand	/
TF card	/
Alarm output	/
Lock control	/

Door contact input	/
General	
Button	/
Installation	Flush mounting, surface mounting
Indicator	/
Weight	Net weight: 160 g Gross weight: 421 g
Protective level	IP65
Working temperature	-40 °C to 55 °C (-40 °F to 131 °F)
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	98.5 mm × 100 mm × 33.7 mm (3.87" × 3.95" × 1.33")
Battery	/
Application environment	Outdoor
Power consumption	≤ 2 W

▪ Available Model

DS-KD-E/AC

▪ Dimension

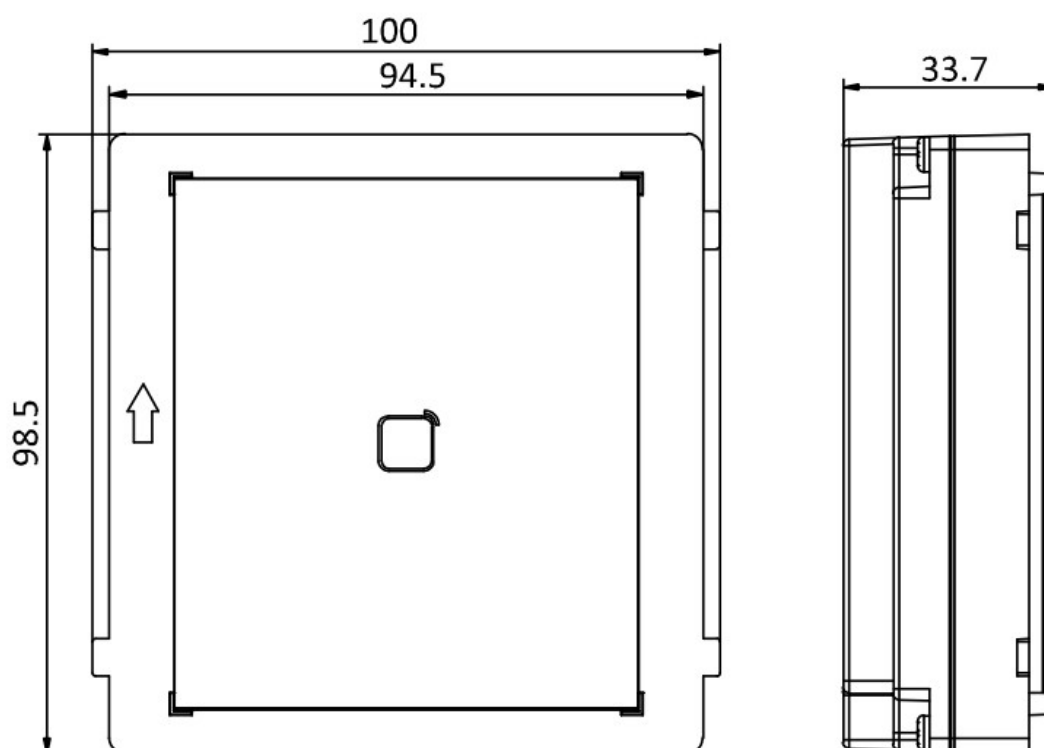

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®