

DS-7608NXI-I2/S(C) 8-ch 1U AcuSense 4K NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 1-ch facial recognition for video stream
- Up to 4-ch facial recognition for face picture
- Up to 8-ch IP camera inputs
- Up to 16-ch 1080p decoding capability

▪ Function

Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel IP cameras connection

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 2 SATA interfaces for HDD connection
- 8-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- POS information overlay on live view and playback
- POS triggered recording and alarm

Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect for easy network management


▪ Specification

Intelligent Analytics	
AI by NVR	Facial recognition, perimeter protection, motion detection 2.0
AI by Camera	
Engine	
AcuSearch	
Performance	N/A
Perimeter Protection	
By NVR	
By Camera	
Facial Recognition	
Face Picture Library	Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB)
Face Picture Comparison	4-ch face picture comparison alarm
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Facial Detection and Analytics Performance	1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)
Motion Detection 2.0	
By NVR	
By Camera	
ANPR	
By Camera	
Vehicle Attributes	
Plate Attributes	
Devices and Servers	
Heat Map Cameras	N/A
Video and Audio	
IP Video Input	8
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	256 Mbps
HDMI Output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Video Output Mode	HDMI/VGA independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Decoding	
Decoding Format	H.265,H.265+,H.264,H.264+,MPEG4
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	16-ch
Live View Window Division	1/4/6/8/9
Aux Port Window Division	1/4/6/8/9
Decoding Capability	16-ch @ 1080p (30 fps)
Dual-Stream Recording	Support


Audio Compression	G.711ulaw,G.711alaw,G.722,G.726,MP2L2
Stream Type	Video, Video & Audio
Network	
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Remote Connection	
Network Protocol	
API	
Compatible Browser	
Camera Access Protocol	ONVIF(Version 2.5), RTSP
Auxiliary Interface	
SATA	2 SATA interfaces
Capacity	Up to 8 TB capacity for each disk
Alarm In/Out	4/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power Supply	≤ 40 W
GUI Language	
Consumption	DS-7608NXI-I2/S(中性)(C),DS-7608NXI-I2/S(标配)(C):≤ 15W DS-7608NXI-I2/S(标配)(C)/阿联酋HTL:≤ 30 W (without HDD)
Working Temperature	-10°C ~ + 55°C
Working Humidity	10% to 90%
Chassis	1U
Dimension (W × D × H)	385 × 315 × 52 mm (11.6"× 9.5" × 1.6")
Weight	≤ 1.6 kg (3.5 lb)
Certification	
Obtained Certification	
CE	

▪ Physical Interface

No.	Description	No.	Description
1	LAN1 and LAN2 network interfaces	6	USB 3.0 interface and VIDEO OUT
2	AUDIO IN//AUDIO OUT	7	Power supply
3	HDMI interface	8	GND
4	VGA interface	9	Power switch
5	ALARM IN/OUT		

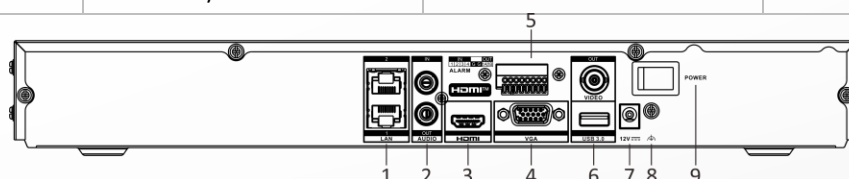

▪ Dimension

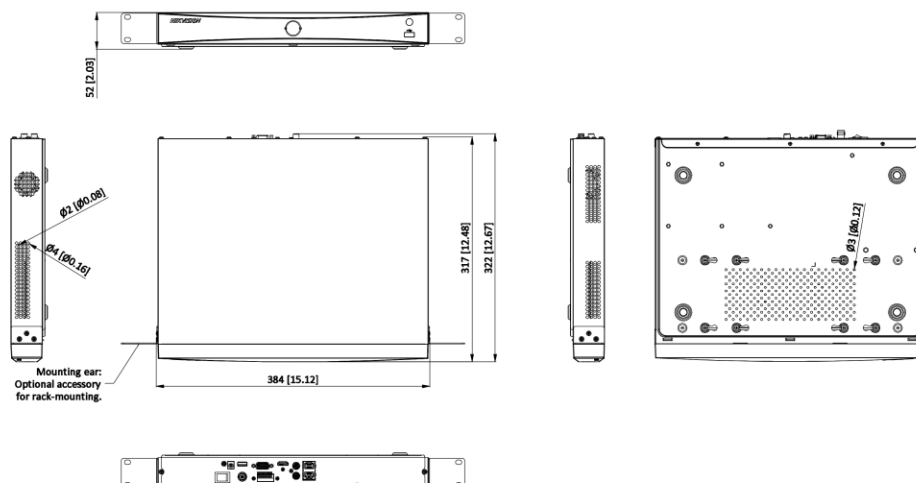

Unit:mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

