


DH-PFM376-G

Solar Mount

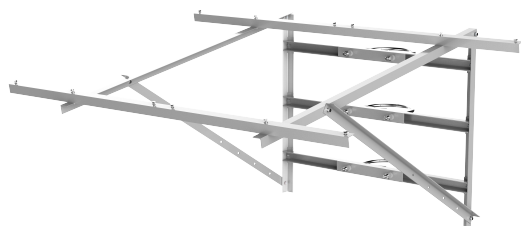

- Q235 carbon structural steel with hot-dip galvanization and anti-corrosion protection.
- Adjusts to multiple inclination angles, such as 10°, 20°, 30°, 40° and 50°, making it suitable for use in different latitudes.
- Pole mount : supports being mounted to poles that are 150 to 220 mm in diameter.
- Supports carrying up to 2 solar panels, and is only suitable for use with DH-PFM371-M275 solar panels.

Series Overview

The Integrated Solar Power Supply System reliably provides stable power to devices when there is no mains power supply available. It is easy to install and use, and is highly durable and reliable.

Technical Specification

General

Installation	Pole mount
Material	Q235
Color	Sliver Gray
Pole Diameter	150 mm–220 mm
Adjustable Inclination Angle	10°; 20°; 30°; 40°; 50°
Number of supported solar panels	2 pcs × 275 W solar panels
Net Weight	38 kg (83.78 lb)
Gross Weight	40 kg (88.18 lb)
Product Dimensions	1730.7 mm × 1810.0 mm × 909.2 mm (68.14" × 71.26" × 35.80")
Packaging Dimensions	1930 mm × 290 mm × 165 mm (75.98" × 71.26" × 6.49")
Operating Temperature	−40 °C to +85 °C (−40 °F to 185 °F)
Operating Humidity	< 95% (RH)
Storage Temperature	−20 °C to +60 °C (−4 °F to 140 °F)
Storage Humidity	< 95% (RH)
Bracket Wind Resistance Rating	Level 10 (Data from Dahua Labs)

Ordering Information

Type	Model	Description
Camera Mount	DH-PFM376-G	Solar Mount

Dimensions (mm[inch])

