

**DS-2CD3686G3-IZSU/SL(Y)****8 MP Strobe Light and Audible Warning Motorized Varifocal Bullet Network Camera**

AcuSense 3.0



Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- HIK AI-ISP for excellent noise reduction effect
- 130 dB WDR, support Auto mode, clear imaging against strong back light
- AcuSense: Focus on person and vehicle classification based on deep learning
- Motorized varifocal lens for easy installation and monitoring
- Built-in arrayed dual-microphone for real-time high quality audio security
- /SL: Active strobe light and audio alarm to warn intruders off
- Water and dust resistant (IP67) and vandal resistant (IK10)
- -Y: Anti-corrosion design, providing reliability and longevity compared to standard (NEMA 4X)

## ▪ Specification

| Camera                 |                                                                                                                                                                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor           | 1/1.8" Progressive Scan CMOS                                                                                                                                                                                                                                                                               |
| Max. Resolution        | 3840 × 2160                                                                                                                                                                                                                                                                                                |
| Min. Illumination      | Color: 0.001 Lux @ (F1.2, AGC ON), B/W: 0 Lux with IR                                                                                                                                                                                                                                                      |
| Shutter Time           | 1 s to 1/100,000 s                                                                                                                                                                                                                                                                                         |
| Day & Night            | IR cut filter                                                                                                                                                                                                                                                                                              |
| Angle Adjustment       | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°                                                                                                                                                                                                                                                       |
| Lens                   |                                                                                                                                                                                                                                                                                                            |
| Lens Type              | Varifocal lens, motorized lens, 2.7 to 13.5 mm and 7 to 35 mm optional                                                                                                                                                                                                                                     |
| Focal Length & FOV     | 2.7 to 13.5 mm, horizontal FOV 111.9° to 47.5°, vertical FOV 58.0° to 26.7°, diagonal FOV 137.3° to 54.5°<br>7 to 35 mm, horizontal FOV 41.8° to 14.9°, vertical FOV 22.9° to 8.5°, diagonal FOV 48.7° to 17.1°                                                                                            |
| Lens Mount             | 2.7 to 13.5 mm : Ø14<br>7 to 35 mm : Integrated                                                                                                                                                                                                                                                            |
| Iris Type              | Auto-iris                                                                                                                                                                                                                                                                                                  |
| Aperture               | 2.7 to 13.5 mm : Max.F1.2<br>7 to 35 mm : Max.F1.4                                                                                                                                                                                                                                                         |
| Depth of Field         | 1 m to ∞                                                                                                                                                                                                                                                                                                   |
| DORI                   |                                                                                                                                                                                                                                                                                                            |
| DORI                   | 2.7 to 13.5 mm :<br>Wide: D: 87.7 m, O: 34.8 m, R: 17.5 m, I: 8.8 m<br>Tele: D: 186.8 m, O: 74.1 m, R: 37.4 m, I: 18.7 m<br>7 to 35 mm :<br>Wide: D: 218.2 m, O: 86.6 m, R: 43.6 m, I: 21.8 m<br>Tele: D: 580.6 m, O: 230.4 m, R: 116.1 m, I: 58.1 m                                                       |
| Illuminator            |                                                                                                                                                                                                                                                                                                            |
| Supplement Light Type  | IR                                                                                                                                                                                                                                                                                                         |
| Supplement Light Range | 2.7-13.5mm : 60m ; 7-35mm : 80m                                                                                                                                                                                                                                                                            |
| Smart Supplement Light | Yes                                                                                                                                                                                                                                                                                                        |
| IR Wavelength          | 850 nm                                                                                                                                                                                                                                                                                                     |
| HEOP                   |                                                                                                                                                                                                                                                                                                            |
| Open Resources         | DS-2CD3686G3-IZSU/SL(Y):Memory: 40 MB,<br>Smart RAM: 450 MB,<br>eMMC: 2 GB<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标配,<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):NA<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标配),<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):Memory: 40 MB,<br>Smart RAM: 450 MB,<br>eMMC: 2 GB |

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computing Power         | DS-2CD3686G3-IZSU/SL(Y):1.5 TOPS<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标<br>配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):NA<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标<br>配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):1.5 TOPS                                                                                                                                                                                                                                                                                                 |
| Open Capability         | DS-2CD3686G3-IZSU/SL(Y):HEOP 2.0 OpendevSDK<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标<br>配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):NA<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标<br>配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):HEOP 2.0 OpendevSDK                                                                                                                                                                                                                                                                           |
| Deep Learning Structure | DS-2CD3686G3-IZSU/SL(Y):Caffe,PyTorch,TensorFlow,PaddlePaddle,ONNX<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标<br>配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标<br>配):Caffe,PyTorch,TensorFlow,PaddlePaddle,ONNX<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标<br>配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):NA                                                                                                                                                                                                                         |
| Programming Language    | DS-2CD3686G3-IZSU/SL(Y):C,C++<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标<br>配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):NA<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标<br>配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):C,C++                                                                                                                                                                                                                                                                                                       |
| <b>Video</b>            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Main Stream             | 50 Hz:<br>25 fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)<br>60 Hz:<br>30 fps (3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)                                                                                                                                                                                                                                                                                                                                                 |
| Sub-Stream              | DS-2CD3686G3-IZSU/SL(Y):50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标<br>配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):50 Hz: 25 fps (1280 × 720, 640 ×<br>480, 640 × 360)<br>60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标<br>配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):50 Hz: 25 fps (1280 × 720, 768 ×<br>432, 640 × 360)<br>60 Hz: 30 fps (1280 × 720, 768 × 432, 640 × 360) |
| Third Stream            | 50 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)                                                                                                                                                                                                                                                                                                                                                                                                                   |

|                             |                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fourth Stream               | 50 Hz: 1 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 1 fps (1280 × 720, 640 × 480, 640 × 360)                                                                                                                                                                                                                                                                                    |
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+,<br>Sub-stream: H.265/H.264/MJPEG,<br>Third stream: H.265/H.264,<br>Fourth stream: H.265/H.264/MJPEG,                                                                                                                                                                                                                                          |
| Video Bit Rate              | 32 Kbps to 16 Mbps                                                                                                                                                                                                                                                                                                                                                                    |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile                                                                                                                                                                                                                                                                                                                                          |
| H.265 Type                  | Main Profile                                                                                                                                                                                                                                                                                                                                                                          |
| Bit Rate Control            | CBR, VBR                                                                                                                                                                                                                                                                                                                                                                              |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                                                                                                                                                                                                                              |
| Region of Interest (ROI)    | 5 fixed regions for main stream and sub-stream                                                                                                                                                                                                                                                                                                                                        |
| e-PTZ                       | Support Patrol and Auto Tracking settings                                                                                                                                                                                                                                                                                                                                             |
| AI Encoding                 | DS-2CD3686G3-IZSU/SL(Y):NA<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标配), DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):NA<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标配, DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):Yes                                                                                                                                                                                 |
| <b>Audio</b>                |                                                                                                                                                                                                                                                                                                                                                                                       |
| Audio Type                  | Mono sound                                                                                                                                                                                                                                                                                                                                                                            |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                                                                                                                                                                                                                                                                              |
| Audio Bit Rate              | 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/16 Kbps to 64 Kbps (AAC-LC)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)                                                                                                                                                                                                                                                |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/48 kHz                                                                                                                                                                                                                                                                                                                                                            |
| Environment Noise Filtering | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Network</b>              |                                                                                                                                                                                                                                                                                                                                                                                       |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets, SRTP, SFTP                                                                                                                                                                                               |
| Simultaneous Live View      | Up to 6 channels                                                                                                                                                                                                                                                                                                                                                                      |
| API                         | ISAPI, SDK, ISUP, ONVIF (Profile S, Profile T, Profile G, Profile M)                                                                                                                                                                                                                                                                                                                  |
| User/Host                   | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                                                                                                                                                                                    |
| Security                    | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.1/1.2/1.3, host authentication (MAC address) |
| Network Storage             | NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR)                                                                                                                                                                                                                                                                                                                                 |
| Client                      | iVMS-4200, Hik-Connect, Hik-Central                                                                                                                                                                                                                                                                                                                                                   |
| Web Browser                 | Plug-in free live view: Chrome 91+, Firefox 88+, Edge 91+, Safari 13+<br>Local service: Chrome 91+, Firefox 88+, Edge 91+                                                                                                                                                                                                                                                             |
| <b>Image</b>                |                                                                                                                                                                                                                                                                                                                                                                                       |
| Image Parameters Switch     | Yes                                                                                                                                                                                                                                                                                                                                                                                   |

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Settings                | Rotate mode,saturation,brightness,contrast,sharpness,gain,white balance,adjustable by client software or web browser                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Day/Night Switch              | Day,Night,Auto,Schedule                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Image Enhancement             | BLC,HLC,3D DNR,Distortion Correction,Defog                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SNR                           | ≥ 52 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Wide Dynamic Range (WDR)      | 130 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Image Stabilization           | EIS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Privacy Mask                  | 8 programmable polygon privacy masks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Interface</b>              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Ethernet Interface            | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| On-Board Storage              | Built-in memory card slot,support microSD/microSDHC/microSDXC card, up to 512 GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Built-in Speaker              | Max. power consumption: 2 W, max. sound pressure level: 10 cm: 120 dB.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Audio                         | Built-in Microphone: Arrayed dual-microphone,<br>1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium,<br>1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium                                                                                                                                                                                                                                                    |
| Alarm                         | 2 inputs, 2 outputs (max. 24 VDC/24 VAC, 1 A)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Reset Key                     | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power Output                  | 12 VDC, max. 100 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Indicator                     | NA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Event</b>                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Basic Event                   | DS-2CD3686G3-IZSU/SL(Y):Motion detection (support alarm triggering by specified target types (human and vehicle)),video tampering alarm,exception<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):Motion detection (support alarm triggering by specified target types (human and vehicle and animal)),video tampering alarm,exception<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):Motion detection (support alarm triggering by specified target types (human and vehicle)),video tampering alarm,exception |
| Smart Event                   | Scene change detection, audio exception detection, defocus detection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Linkage                       | Upload to FTP/NAS/memory card,notify surveillance center,trigger recording,trigger capture,send email,audible warning,trigger alarm output,strobe light                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Deep Learning Function</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Face Capture                  | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| People Counting               | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Perimeter Protection             | <p>DS-2CD3686G3-IZSU/SL(Y):Line crossing,intrusion,region entrance,region exiting<br/>Support alarm triggering by specified target types (human and vehicle)</p> <p>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):Line crossing,intrusion,region entrance,region exiting<br/>Support alarm triggering by specified target types (human and vehicle)</p> <p>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):Line crossing,intrusion,region entrance,region exiting<br/>Support alarm triggering by specified target types (human and vehicle and animal),people gathering,fast moving,parking,unattended baggage,object removal,combined event</p> |
| <b>General</b>                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Power                            | 12 VDC $\pm$ 25%, 1.21 A, max. 14.5 W,<br>PoE: IEEE 802.3at, Class 4, max. 18 W,2-core terminal block,reverse polarity protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Material                         | Front cover: Metal, body: Metal, bracket: Metal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Dimension                        | $\varnothing$ 140 mm $\times$ 333.8 mm ( $\varnothing$ 5.51" $\times$ 13.14")                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Package Dimension                | 435 mm $\times$ 190 mm $\times$ 180 mm (17.1" $\times$ 7.5" $\times$ 7.1")                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Weight                           | Approx. 1600 g (3.4 lb.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| With Package Weight              | Approx. 2750 g (6.0 lb.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Storage Conditions               | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Startup and Operating Conditions | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| General Function                 | Heartbeat,mirror,flash log,password reset via email,pixel counter,anti-banding                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian                                                                                                                                                                                                                                                                                                                                                           |
| Flashing Light                   | White Light                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Approval</b>                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| EMC                              | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Safety                           | CB: IEC 62368-1: 2014+A11,<br>CE-LVD: EN 62368-1: 2014/A11: 2017                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Environment                      | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Protection                       | IP67:IEC 60529-2013,IK10:IEC 62262:2002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Anti-Corrosion Protection        | NEMA 4X (NEMA 250-2018)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>AE Parameters</b>             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 红外灯数量                            | 4颗红外                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|                            |                                                                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ROM和RAM                    | DS-2CD3686G3-IZSU/SL(Y):ROM: 8GB<br>RAM: 1GB<br>DS-2CD3686G3-IZSUY/SL(7-35mm)(海外标配),DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(海外标配):ROM: 8GB<br>RAM: 1GB<br>DS-2CD3686G3-IZSUY/SL(2.7-13.5mm)(B)海外标配,DS-2CD3686G3-IZSUY/SL(7-35mm)(B)(海外标配):ROM: 512MB<br>RAM: 1GB |
| 恒定光圈                       | 2.7 to 13.5 mm : 不支持<br>7 to 35 mm : Max.F1.7 支持                                                                                                                                                                                                           |
| 聚焦方式(focus control modes)  | auto                                                                                                                                                                                                                                                       |
| ABF                        | 不支持                                                                                                                                                                                                                                                        |
| ICR蓝玻璃 (blue glass module) | 2.7 to 13.5 mm : 支持<br>7 to 35 mm : 支持                                                                                                                                                                                                                     |
| 内插 (Connector panel)       | 不支持                                                                                                                                                                                                                                                        |
| 螺丝材质 (Screw material)      | SUS304                                                                                                                                                                                                                                                     |

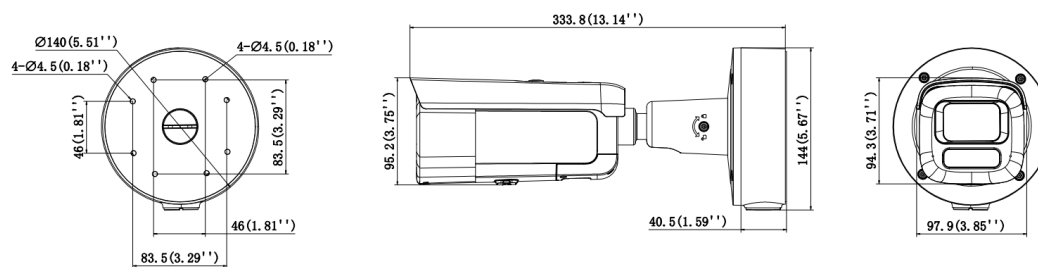
## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has MODERATE PROTECTION.

| Level                  | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.                                             |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.                                                                                                                                  |

## ▪ Dimension





Unit: mm(inch)

## ▪ Accessory

### ▪ Optional

| DS-1476ZJ-SUS                                                                       | DS-1475ZJ-SUS                                                                       | DS-1475ZJ-Y                                                                         | DS-1476ZJ-Y                                                                           | DS-2251ZJ                                                                             |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |

## ▪ Installation Methods

| Corner Mounting<br>DS-1476ZJ-SUS                                                    | Corner Mounting<br>DS-1476ZJ-Y                                                      | Vertical Pole<br>Mounting<br>DS-1475ZJ-SUS                                          | Vertical Pole<br>Mounting<br>DS-1475ZJ-Y                                             | Others<br>DS-2251ZJ                                                                   |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

