


DH-PFA5510H-SG

Anti-corrosion Pole Mount Bracket



Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, and works in temperatures ranging from –40 °C to +60 °C (–40 °F to +140 °F) and in environments with a relative humidity of less than 90%.

Technical Specification

Structure

Casing Material	Stainless steel
Product Dimensions	130.4 mm × 45.0 mm × 170.0 mm (5.13" × 1.77" × 6.69") (L × W × H)
Appearance Color	Silver gray
Net Weight	1.18 kg (2.60 lb)
Gross Weight	1.53 kg (3.37 lb)
Load Bearing	12.0 kg (26.46 lb)
Installation	Pole mount
Pole Diameter	Φ60 mm–Φ270 mm (Φ2.36"–Φ10.63")
Applicable Model	Please see Camera Accessories Selection

- The 316L design provides high reliability and an extended lifespan, ensuring stable and long-term performance in corrosive environments.
- Suitable for a variety of vertical poles, especially those with large diameters.
- Includes a quick mounting buckle that is easy to install, reducing installation time.
- Offers strong load bearing capacity and can support up to 12 kg.

316L

316L Stainless Steel



Packaging Dimensions

239.0 mm × 164.0 mm × 191.0 mm (9.41" × 6.46" × 7.52") (L × W × H)


Environment

Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	<90% (RH)
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Professional Protection *The products are fitted with premium-level anti-corrosion protection, making them ideal for use in sensitive environments such as chemical plants, docks, and coastlines. They perform reliably in areas up to 2 km (1.24 mi) from the coast, as well as in regions prone to acid rain exposure.


Ordering Information

Type	Model	Description
Camera Mount	DH-PFA5510H-SG	Anti-corrosion Pole Mount Bracket

Installation

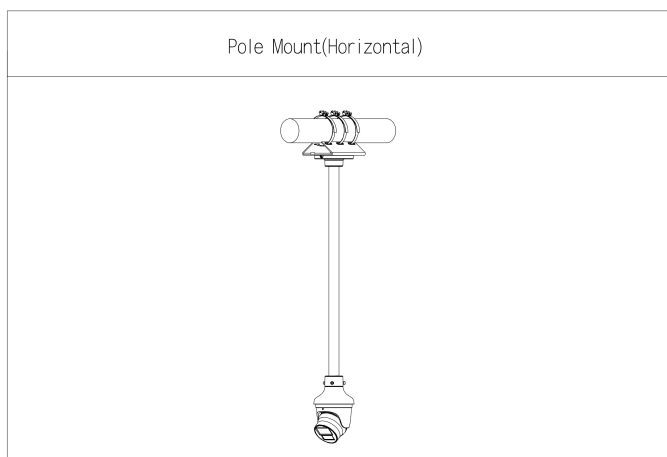

Dimensions (mm[inch])

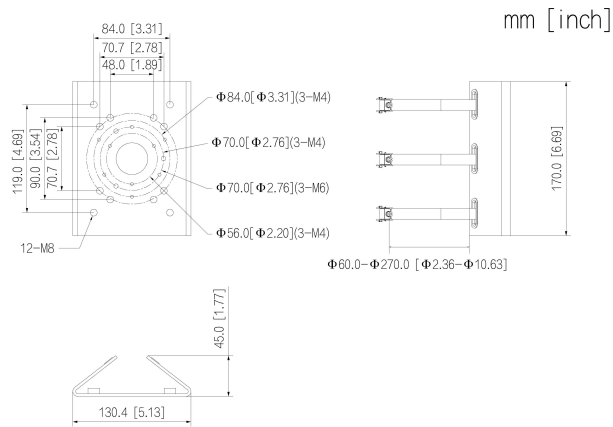

Package Information

- Anti-corrosion pole mount bracket × 1
- M8 × 25 screw × 4
- M6 × 14 screw × 3
- S5.0 wrench × 1
- S6.0 wrench × 1
- Hose clamp × 3
- Installation guide × 1