


DS-QAE0A40G1W-RB
2*20W 4-inch Wall-mounted Amplifier

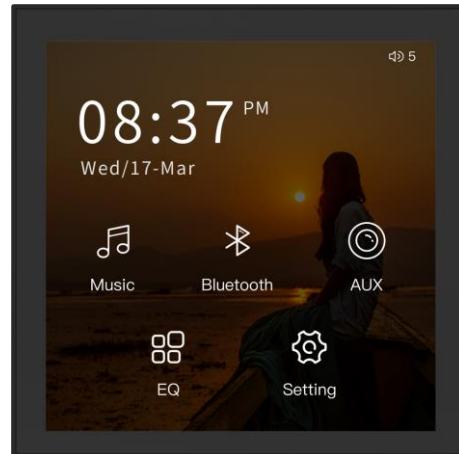

- 4 inch touch screen
- Four-channel speaker output, dual channel stereo sound
- Four audio input methods: Bluetooth, TF card, USB, or AUX audio input
- Supports 485 control
- Linux system
- Supports multiple languages switching


▪ Specification

Function	
Protection Function	short circuit protection, overcurrent protection, over temperature protection
Audio File Format	MP3、WAV、APE、FLAC
Audio	
Rated Power	50 W
Frequency Response	20 Hz to 20 kHz
THD and SNR	THD: ≤1% SNR: ≥90 dB
Interface	
Audio In	AUX : Terminal block,unbalance,10KΩ Bluetooth TFCard, Up to 32 GB Capacity USB
Audio Out	Constant Resistance Output: 4x10W@8Ω 2X20W@4Ω (Interface : Terminal block×4)
USB	USB 2.0 File format: FAT32 USB flash drive file playing logic:traverse play level 3 directory files in the USB flash drive.
Power Interface	Terminal block,recommended wire size 0.5–1.5 mm ²
General	
Material	Plastic
Dimension	86 (Length) x 86 (Width) x 45.5 (Thickness) mm
Weight	About 0.23kg
Display Screen	4-Inch Resolution 480×480
Packing List	Device × 1 Regulatory Compliance and Safety Information × 1
Bluetooth	Bluetooth 5.1 , 10 m
Operating Temperature	-10 °C to 45 °C
Operating Humidity	5%-90%RH (No condensation)
Power Consumption	Standby Consumption: 2.5W Max. Working Consumption: 50 W
CPU	Dual-Core ARM Cortex-A7@1.2GHz
Memory Card Capacity	File format: FAT32 Up to 32G Playback logic: root-directory only

▪ Available Model

DS-QAE0A40G1W-RB

▪ Dimension

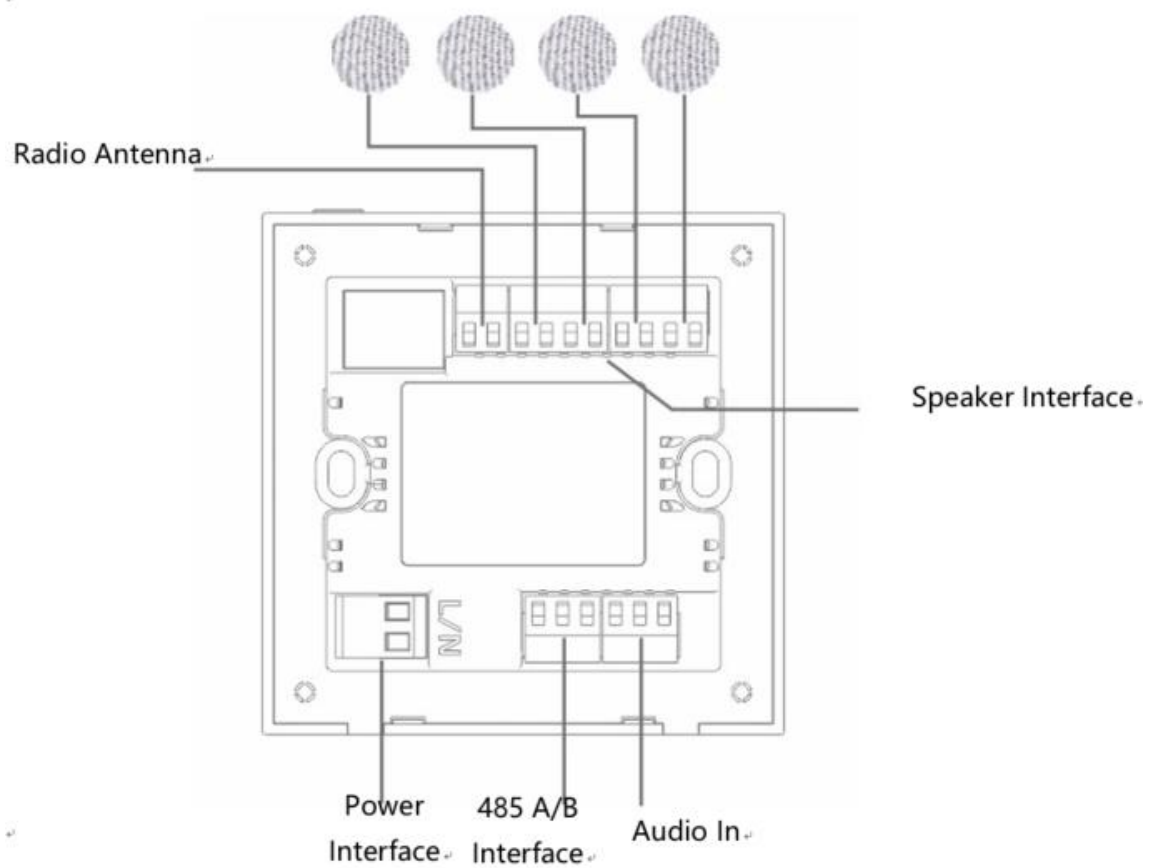

See Far, Go Further



www.hikvision.com
support@hikvision.com

