

DS-KIS602(C) IP video intercom kit



- IP video intercom for villa or house
- One call button for easier calls
- Stores messages and captured pictures in the TF card
- Convenient Hik-Connect APP Mobile Control
- Including: DS-KD8003-IME1(B)/Surface × 1, DS-KH6320-WTE1(B) × 1, 4-port standard PoE switch × 1, DS-KABD8003-RS1 × 1, Administrator card × 1, Key fob × 5, PSUx1


▪ Specification

Door station	
Operation system	Embedded Linux operation system
RAM	256 MB
Door station	
Camera	2MP HD camera
Night vision	Low illumination IR supplement mode:3 m
Backlight compensation	Support
Digital noise reduction	Support
WDR	Support
Field of view	Horizontal: 146°, Vertical: 82°
Video Compression Standard	H.264; H.265; MJPEG
Motion detection	Support
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G711U、 G711A、 G726、 AAC_LC、 AAC_LD、 OPUS、 G722.1
Audio compression Rate	64 Kbps
Door station	
Network protocol	TCP/IP, RTSP, IPV6, ONVIF
Wired network	10/100 Mbps Ethernet
Door station	
Network interface	1 RJ45
RS-485	1 (1 for Hikvision's sub module communication)
Alarm input	4 (2 exit buttons and 2 door contacts by default)
Debugging port	1
Lock control	2 (2 relay, max to 30 V, 2 A)
TAMPER switch	1
Power interface	12 VDC power output (max to 12 V, 500 mA)
Door station	
Power consumption	≤ 5 W
Working temperature	-40° C to 60° C (-40° F to 140° F)
Working humidity	10% to 95%
Dimension	Device: 98 mm × 100 mm × 42 mm (3.86" × 3.94" × 1.65") Cover: 117 × 107 × 4 mm (4.61" × 4.21" × 0.16") Installation Frame: 117 × 107 × 32.7mm (4.61" × 4.21" × 1.29")
Installation	Surface mounting
Protection level	IP65
Indicator	0
Power supply	IEEE802.3af, standard PoE 12 VDC
Indoor station	
Operation system	Embedded Linux operation system
ROM	32 MB

RAM	128 MB
Processor	Embedded high performance processor
Indoor station	
Screen size	7-inch colorful TFT screen
Type	Colorful TFT screen
Operating method	Capacitive touch screen
Resolution	1024 × 600
Indoor station	
Lens	/
Resolution	/
Wide dynamic range (WDR)	/
Video compression standard	/
FOV	/
Indoor station	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711u、G.711a、Opus、AAC-LD、AAC-LC、G.726、G.722.1
Audio output	1 built-in loudspeaker
Audio compression Rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Indoor station	
Notice capacity	200
Linked network camera capacity	16
Linked indoor extensions capacity	16
Linked doorphone capacity	17
Indoor station	
Network protocol	TCP/IP, RTSP, SIP, IPv6, ONVIF
Wi-Fi	WiFi 802.11b/g/n
Bluetooth	Reserved
3G/4G	/
Indoor station	
Alarm input	8
Network interface	1 RJ-45 10/100Mbps self-adaptive
TAMPER	/
RS-485	1
USB	/
TF card	Support TF card, up to 128 G
Alarm output	/
Power supply output	Max. 12VDC 0.2 A (Only when powered by PoE)
Debugging port	1
Relay	2 relays, Max. 30VDC 0.3A
Indoor station	
Button	/
Power supply	IEEE802.3af, Standard PoE, 12 VDC


Power consumption	≤ 12 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	200 mm × 140 mm × 23.3 mm (7.87" × 5.51" × 0.92")
Installation	Surface mounting
Application environment	Indoor
Protective level	/
Weight	Without package: 339.1 g (0.75 lb), With package: 562.4g (1.24 lb)
Language	English, Arabic, French, Russian, Spanish, Spanish (Latin America), Italian, German, Polish, Turkish, Portuguese, Portuguese (Brazil), Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese

▪ Dimension

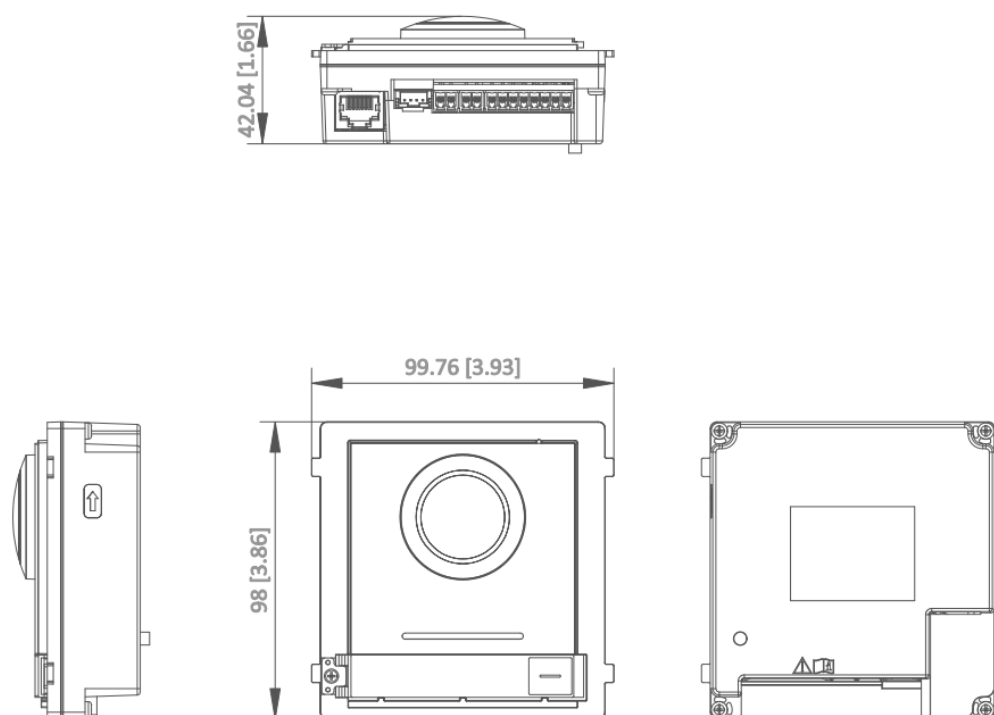

Unit:mm [inch]

SCALE 1:1

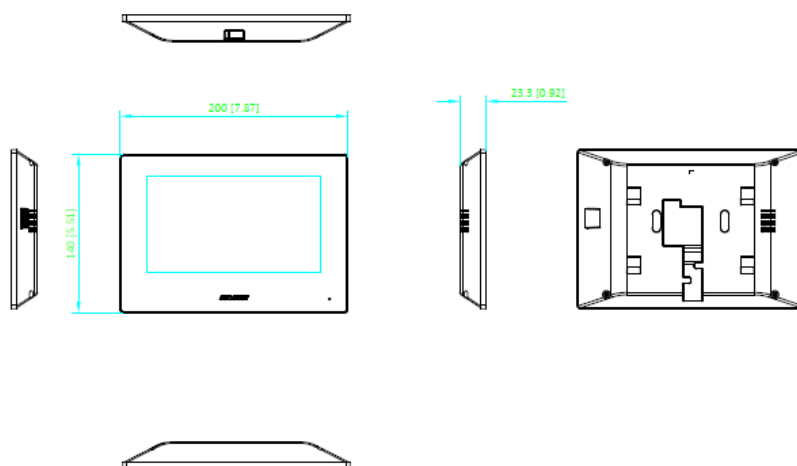

Unit:mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

