

DS-KD-KP/S KD8 Series Pro Modular Door Station






- Keypad module of modular door station
- Supporting input pin code to open door, call indoor station
- IP65 and IK07 higher protection level
- Backlight compensation behind the keypad buttons
- Easy to use and extend
- Stainless Steel high quality material

▪ Specification

System parameters	
Operation system	Linux
ROM	/
RAM	/
Processor	Embedded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Supplement light	/
Video compression standard	/
Audio parameters	
Audio input	/
Audio compression standard	/
Audio output	/
Audio compression bitrate	/
Audio quality	/
Volume adjustment	/
Capacity	
User capacity	/
Face capacity	/
Card capacity	/
Linked network camera capacity	/
Network parameters	
Network protocol	TCP/IP, RTSP
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	/
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
TAMPER	/
Exit button	/
RS-485	2
USB	/
Wiegand	/
TF card	/
Alarm output	/
Lock control	/

Door contact input	/
General	
Button	12
Installation	Flush mounting, surface mounting
Indicator	/
Weight	Net weight: 190 g Gross weight: 438 g
Protective level	IP65, IK07
Working temperature	-40 °C to 55 °C(-40 °F to 131 °F)
Working humidity	10% to 95%
Dimension (W × H × D)	98.2 mm × 100.2 mm × 33.7 mm (3.87" × 3.95" × 1.33")
Battery	/
Power supply	12 VDC, powered for other module
Application environment	Outdoor
Power consumption	1 W

▪ Dimension

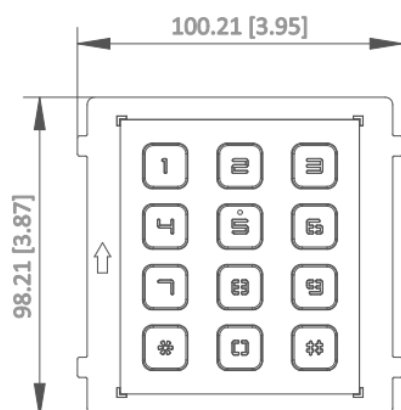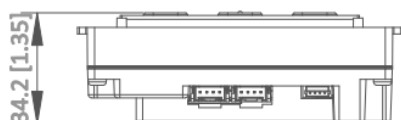

Unit:mm [inch]

SCALE

1:1

▪ Accessory

Optional

DS-KD7003EY-IME2	DS-KDE-ACR3	DS-KD-ACW2#EU	DS-KD-ACW3#EU	DS-KD-ACF2#EU
				
DS-KD-ACF3#EU	DS-KD8003Y-IME2/ S	DS-KD8003-IME1(B) /S	DS-KD8003-IME1(B) /NS	DS-KD8003Y-IME2/ NS
				
DS-KD-PMR	DS-KD-ACF3/S	DS-KD-ACF2/S	DS-KD-ACW3/S	DS-KD-ACW2/S
				
DS-KA01-ZX-10	DS-KABD8003-RS2	DS-KD-ACW3	DS-KD-ACW2	DS-KABD8003-RS3
				
DS-KD-ACF3	DS-KD-ACF2			
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

