

DS-KIS902-S IP Video Intercom Kit



- Convenient Hik-Connect APP Mobile Control
- Multiple authentication methods: Face, Pin Code, Card, QR Code, Blue tooth
- Standard PoE power supply
- Stores messages and captured pictures in the TF card
- Including: DS-KV9503-WBE1 x 1, DS-KH6350-WTE1 White x 1, 4 ports standard PoE switch x 1, DS-KABV9503-RS x 1, Administrator card x 1, Key fob x 5, PSU x 1


▪ Specification

Door station	
Operation system	Embedded Linux operation system
Flash	4 GB
RAM	1 GB
Door station	
Screen size	4.3-inch
Resolution	800 × 480
Type	IPS
Operation method	Non-touch screen
Brightness	425 cd/m ²
Door station	
Supplement light	IR light, up to 3 m
Resolution	Main stream: 1920 × 1080p, 1280 × 720p Sub stream: 1280 × 720p , 640 × 480p
Lens	2 × 2 MP
Wide dynamic range (WDR)	Support 120 dB
FOV	Horizontal: 88°, Vertical: 44°
Video Compression Standard	H.264, H.265, MJPEG
Motion detection	Support
Door station	
Audio input	1 built-in omnidirectional microphone
Audio output	1 Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Audio compression standard	G711U、 G711A、 G726、 AAC_LC、 AAC_LD、 OPUS、 G722.1
Audio compression Rate	64 Kbps
Door station	
Face capacity	10000
User capacity	20000
Card capacity	100000
Door station	
Network protocol	TCP/IP, RSTP
Wi-Fi	IEEE802.11b, IEEE802.11g, IEEE802.11n
Bluetooth	Reserved
Door station	
Card reading frequency	13.56 MHz
Face recognition distance	0.3 to 2 m
Face recognition accuracy rate	≥ 99%
Face recognition duration	< 0.2 s per person
Door station	
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
RS-485	1
Alarm input	4 (2 exit buttons and 2 door contacts by default)

Lock control	2 relays, Max. 30 VDC 2 A
TAMPER switch	1
Exit button	1
Door contact input	1
Door station	
Button	1 physical button(s)
Power consumption	≤ 6 W
Working temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Working humidity	10% to 90% (no-condensing)
Dimension	182 mm × 85 mm × 26 mm (7.16" × 3.34" × 1.01")
Installation	Surface mounting
Protection level	IP65, IK08
Indicator	/
Application environment	Outdoor
Power supply	IEEE802.3af, standard PoE 12 VDC, 1.5 A
Weight	Net weight: 0.405 kg; Gross weight: 0.752 kg
Indoor station	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB
Indoor station	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Indoor station	
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps
Volume adjustment	Adjustable
Indoor station	
Notice capacity	200
Linked indoor extensions capacity	16
Indoor station	
Protocol	TCP/IP, SIP, RTSP
Wi-Fi	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Indoor station	
RS-485	1
Network interface	1 RJ-45 10/100 Mbps self-adaptive
Alarm input	8-ch alarm inputs
TF card	Max to 128 G
Alarm output	2

Indoor station	
Power consumption	≤ 5 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Power supply	12 VDC, IEEE802.3af, Standard PoE
Working humidity	10% to 90%
Dimension (L x W x H)	175 mm × 113.5 mm × 21 mm (6.9" × 4.5" × 0.83")
Installation	Wall mounting, table mounting
Application environment	Indoor
Weight	Net weight: 355 g (0.8 lb) Gross weight: 683 g (1.5 lb)

Dimension

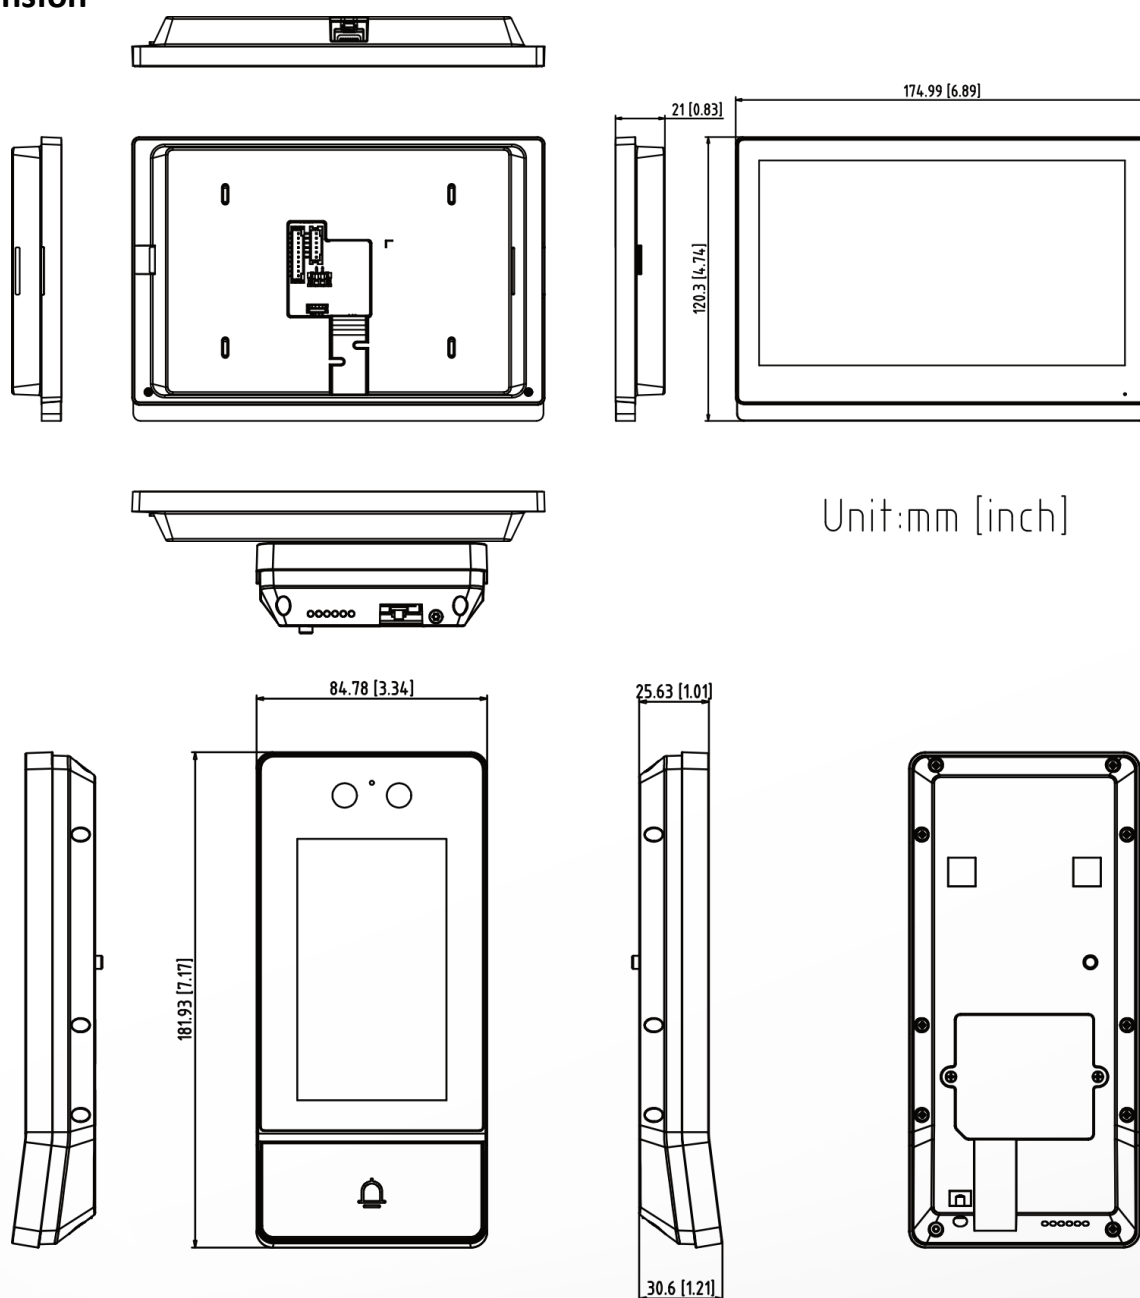

Unit:mm [inch]

Unit:mm [inch]

▪ **Accessory**

▪ **Optional**

DS-KABH6350-T	DS-KABV9503-RS
	

See Far, Go Further



www.hikvision.com
support@hikvision.com

