

DS-3WR30X-V **AX3000 Dual Band Gigabit Wi-Fi Router**



- Three 5 GHz antennas for transmitting and receiving the signal, providing a broader signal coverage.
- 3000Mbps wireless speed
- Support HC&HPP APP management
- Roaming Support
- Wizard guidance for easy setup


▪ Specification

Model		DS-3WR30X-V
General	Product	
	Dimensions (W × H × D)	245 mm x 214 mm x 50 mm
	Package	
	Dimensions (W × H × D)	390mm*310mm*54mm
	Net Weight	0.4kg
	Gross Weight	0.94kg
	Packing List	3000Mbps Wi-Fi6 Router x 1 Power Supply Adaptor x 1 CAT5e Network Cable x 1 Quick Start Guide x 1 Regulatory Compliance and Safety Information x1
	Packing Method	Single pack
	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	10% to 90% RH non-condensing
	Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Wireless Parameter	Storage Humidity	5% to 95% RH non-condensing
	Installation Mode	Desk-Mounted
	Wireless Standard	IEEE 802.11a/n/ac/ax @5GHz IEEE 802.11b/g/n/ax @2.4GHz
	Working Frequency Band	2.4 GHz, 5 GHz
	Wireless Range	Up to 1506 ft ² /140 m ² (Recommend coverage for home use, actual Wi-Fi range varies depending on the layout and wall materials)
	Max. Connections	256
	Recommended Connections	60
	Transmitting Power	CE: <20dBm(2.4GHz) <23dBm(5GHz)
	Wireless Features	MU-MIMO supported Beamforming supported OFDMA Supported
	Antenna	5 high gain antennas

	Antenna Gain	2.4G: 4dBi 5G: 5dBi
	Receiving Sensitivity	5 GHz: -88.5 dBm@HT80-MCS0 -63 dBm@HT80-MCS9 2.4GHz: -92.5 dBm@HT40-MCS0 -74 dBm@HT40-MCS7
	Max. Wi-Fi Speed	≤ 3000 Mbps 5GHz: 2402Mbps 2.4GHz: 574Mbps
Hardware Parameter	Network Interface	1 × 10/100/1000 Mbps Adaptive WAN Port, 3 × 10/100/1000 Mbps Adaptive LAN Port
	LED Indicator	Red/blue for different working states, flashing mode
	Button	Reset button, WPS/MESH Button
	RAM	256MB DDR3
	ROM	128M nand
	Power Supply Method	Power Supply Adapter
	Power Specifications	DC 12 V, 1 A
	Max. Power Consumption	≤15.495W
Software Function	Operating Mode	Router Mode Wireless Extender Mode Access Point Mode
	WAN Mode	DHCP Static IP PPPOE
	IP Version	IPv4 IPv6
	Parental Control	Speed Limit Internet Access Period Filter URL Parental Control Custom Profiles
	Firewall	Forbid UDP flood attack Forbid TCP SYNC flood attack Forbid ICMP flood attack
	DDNS	Oray, No-IP, DynDNS
	VPN	PPTP Server, L2TP Server, PPTP Client, L2TP Client, OpenVPN Server, OpenVPN Client
	NAT Forwarding	Port Mapping DMZ UPnP
	Others	VLAN/IPTV, IGMP, WAN Self-Adaption, Quick Diagnosis, WIFI Optimization, Ping/Tracert
	MESH	Hikvision Mesh

	Security Mode	WPA2-PSK,WPA/WPA2-PSK,WPA2-PSK/WPA3-SAE
	Security Mechanism	Support fast and secure WPS connection Support hiding wireless network name Support controlling terminal network connection Support firewalls Login Authentication
	Management Method	Web Control: PC, mobile App Control: HPP, HC TR069(TR098/TR181)
	Upgrade	Web Upgarde App Cloud Upgrade Auto Upgrade
	System Log	System log
	DHCP	DHCP Client List DHCP Server
	Roaming	802.11k/v

- Physical Interface
- Dimension

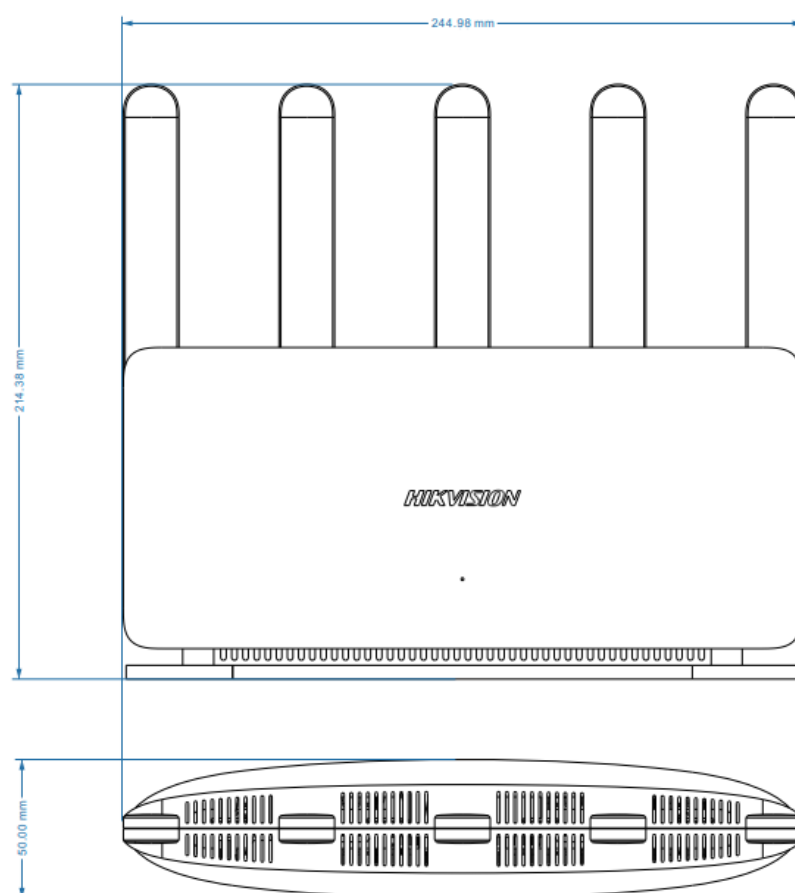

See Far, Go Further



www.hikvision.com
support@hikvision.com

