

DS-D5022F2-5V2
21.5" FHD 100Hz VA Monitor



- VA technology, 178° ultra-wide view screen.
- 8 bit LVDS FHD (1920 × 1080) display.
- Ultra-thin device body with ultra-thin border for 3 sides.
- 100 Hz refresh rate, more fluid and life-like video.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.


▪ Specification

Display	
Screen Size	21.5 inch, 54.48 cm
Active Display Area	478.65 mm (H) × 260.28 mm (V), 12.45 dm ²
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.241 (H) mm × 0.241 (V) mm
Brightness	250 cd/m ²
Viewing Angle	178° (H) / 178° (V)
Color Depth	8 bit, 16.7 M
Contrast Ratio	3000 : 1
Response Time	8 ms
Refresh Rate	100 Hz
Haze	Haze 25%, 3H
Reliability	7 × 24 H
Color Gamut	72% NTSC
Interface	
Video & Audio Input	HDMI 1.4 × 1, VGA × 1
Video & Audio Output	Audio Out × 1
Data Transmission Interface	None
Control Interface	None
Working Environment	
Working Temperature	0°C to 40 °C (32 °F to 104 °F)
Working Humidity	20% to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% to 90% RH (Non-Condensing)
General	
Power Supply	DC 12V , 2A
Power Consumption	≤ 24W
Network Standby Power Consumption	≤ 0.5 W
Standby Time	600s
Casing Material	Plastic
VESA	75 mm × 75 mm (4 - M4 × 6 mm)
Bezel Width	2.38 mm (top/left/right), 21.55 mm (bottom)
Product Dimensions (W × H × D)	With base: 493.26 (W) mm × 392.33 (H) mm × 196 (D) mm (19.42 (W) × 15.45 (H) × 7.72 (D)) inch Without base: 493.26 (W) mm × 290.14 (H) mm × 44.98 (D) mm (19.42 (W) × 11.42 (H) × 1.77 (D)) inch
Package Dimensions (W × H × D)	598 (W) mm × 391 (H) mm × 106 (D) mm (23.54 (W) × 15.39 (H) × 4.17 (D)) inch
Net Weight	2.0 ± 0.5 kg (4.4 ± 1.1 lb)
Gross Weight	3.2 ± 0.5 kg (7.1 ± 1.1 lb)
Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1


Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information
---------	---

▪ Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
Audio out	3.5mm Audio output interface	DC	DC 12V 2.0A input interface

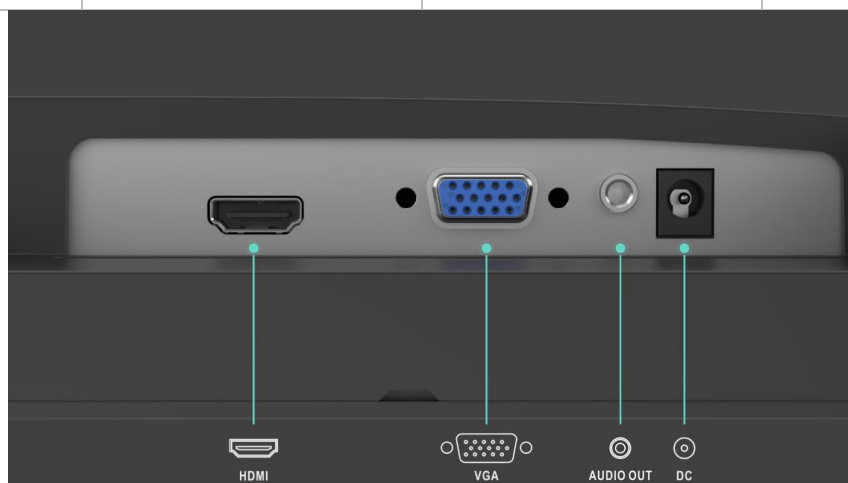

▪ Dimension

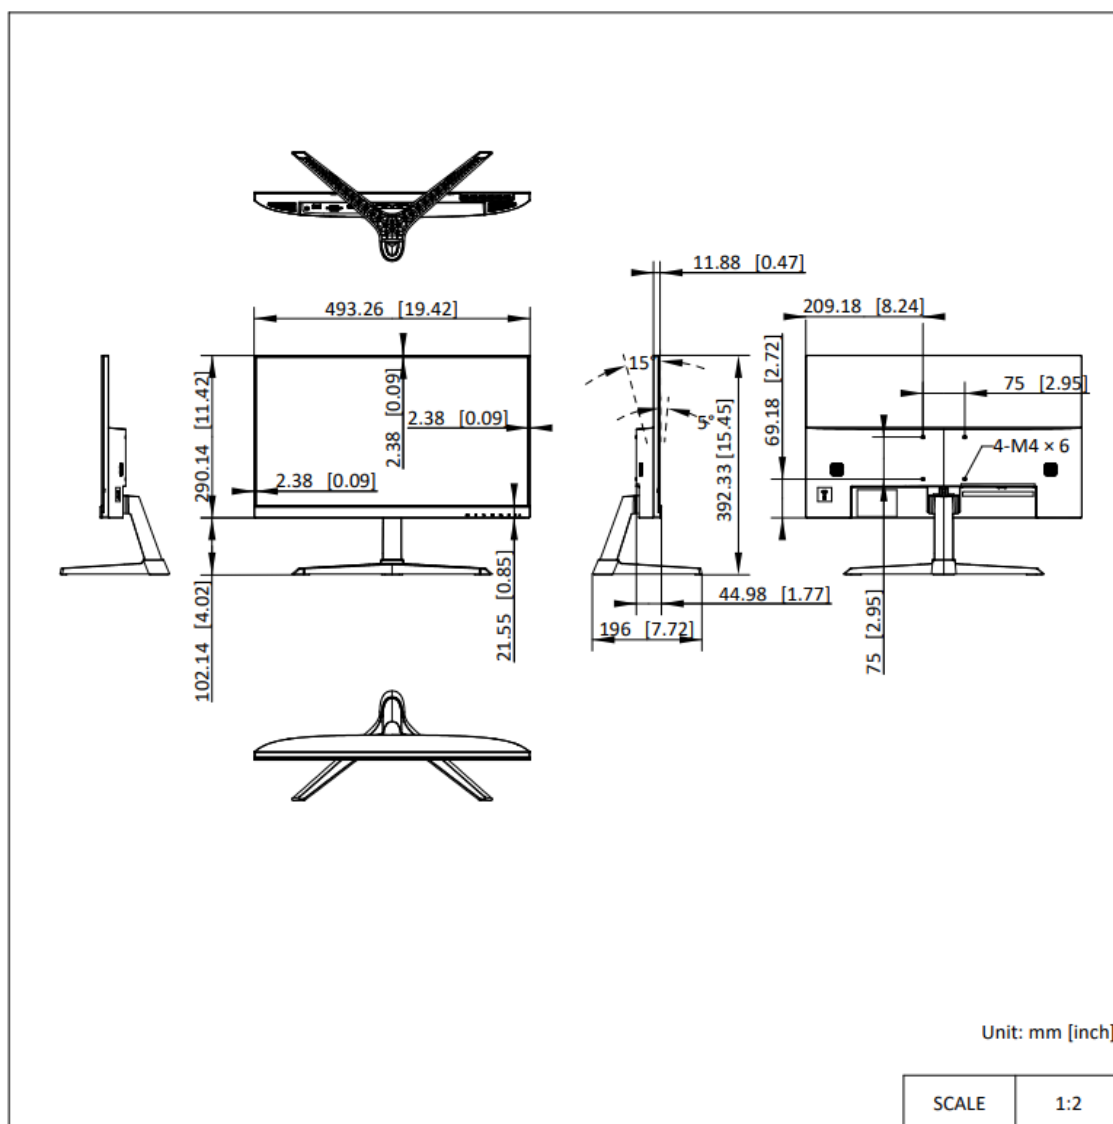

- Accessory
- Optional

DP-D501940-1X1-Q	DS-DM1940W
1-NW-Q0.1-TY/V20	
0	

See Far, Go Further



www.hikvision.com
support@hikvision.com

