

DS-2FDI51-OW/A IR Supplemental Light



- Support light compensation brightness adjustment function
- Dedicated for surveillance video
- Built-in high-efficiency patented gentle fill light
- Utilizing high-end materials (LED beads, power supply, lenses, glass, cables, shell materials, etc.), with stable performance and strong adaptability to various environments
- The lamp body design is novel and exquisite, and installation is simple
- Structural components, driver, and optical design are independently designed
- Stable performance, strong environmental adaptability, and long design life




▪ Specification

Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 100 m
Supplement Light Number	16
General	
Power	110~220 VAC $\pm$ 10%, 0.25~0.44 A, max. 28 W
Material	Aluminum Alloy
Dimension	215.3 mm $\times$ 146 mm $\times$ 131.6 mm (8.47" $\times$ 5.75" $\times$ 5.18")
Package Dimension	261 mm $\times$ 192 mm $\times$ 181 mm (10.28" $\times$ 7.56" $\times$ 7.13")
Weight	Approx. 3290 g (7.25 lb.)
With Package Weight	Approx. 3690 kg (8.14 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Approval	
EMC	CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021
Safety	CE-LVD: EN 62368-1:2014/A11:2017
Protection	IP66: IEC 60529-2013

▪ Available Model

DS-2FDI51-OW/A

▪ Dimension

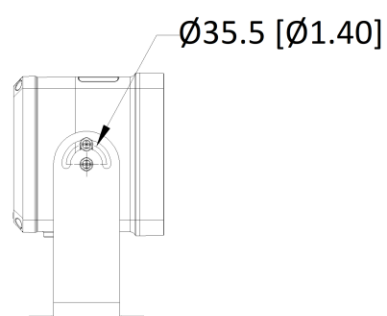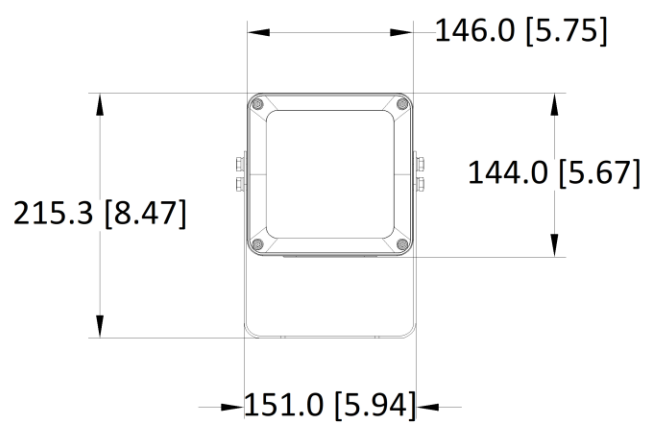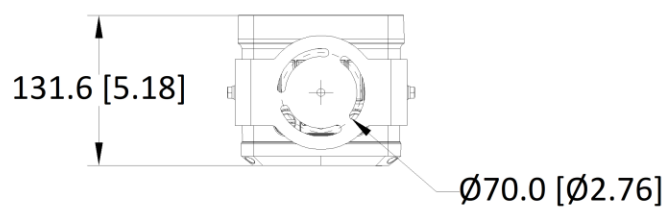

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

