


DS-TMG423**Barrier gates with fence boom pole**


- Adopts integrated machine core. Parallel gear decelerates linkage arm transmission to ensure stability and efficiency.
- Supports convenient side installation with compact structure.
- Adopts quenching process for carbon steel gear to realize wear-resistant and impact-resistant functions and extend product life.
- Adopts small DC brushless motor with low noise to increase output torque and realize precise intelligent control.
- Supports rebound for obstacle and opening priority.
- Adopts DC variable frequency control to enable smooth operation with fast boom pole opening and slow boom pole closing.
- Supports event log to enable convenient monitoring.
- Supports multiple anti-fall modes such as IR, vehicle detectors, and radars.
- Supports fault code detection on the nixie tube, log record, and abundant status indicating. Based on the fault code displayed on the nixie tube, you can realize quickly problems locating and maintenance.
- Supports manually opening boom pole. You can turn hand wheel to keep barrier gate opening during power cutoff.
- Delayed boom pole closing (10 s delay time by default). Supports 99 shifts (initial status 2 s, 2 s gap between each shift).
- Supports auto boom pole opening during power cutoff. The barrier gate can open automatically to allow fire trucks in (optional components required).


▪ Specification

Barrier Housing	
Barrier Housing Material	SGCC
Barrier Housing Thickness	1.5 mm
Barrier Housing Door Thickness	1.2 mm
Barrier Housing Color	Iron gray
Barrier Housing Door Color	Orange red
Boom Pole Installation Height	885 mm
Body Indicators	DS-TMG423, DS-TMG423-L, DS-TMG423-R: No body indicator DS-TMG423/B, DS-TMG423-L/B, DS-TMG423-R/B: With body indicator. Green: arrow indicator. Red: passing prohibition indicator.
Barrier Gate General	
Rising Speed	4m: 3s, 5m: 5s
Falling Speed	4m: 3s, 5m: 5s
Boom Pole Direction	DS-TMG423-L: Left DS-TMG423-R: Right
Motor Type	DC brushless motor
Matched Boom Pole Type	Fence boom pole
Boom Pole Falling Delay	10 s by default (configurable), min. 2 s (every 2 s followed a gap)
Number of Cycles	5,000,000
Working Voltage	100-120VAC / 200-240VAC (default 220-240V , switchable)
Consumption	DS-TMG423-L, DS-TMG423-R: Max. 168 W DS-TMG423-L/B, DS-TMG423-R/B: Max. 176 W
Temperature and Humidity	Temperature: -30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 90%
Rising Boom Pole for Poweroff	Optional, not supported by default
Barrier Gate	
Duty Cycle	100%
Interface	
RS-485	1 group
Rising to Limit	1 group
Falling to Limit	1 group
Open	1 group
Close	1 group
Stop	1 group
IR/Vehicle Detector/Radar	1 group
Traffic Signal Light	1 group, external power supply required, max. 220 VAC supported
Boom Pole	
Boom Pole Color	White background with red bar
Boom Pole Weight	3 m: 7.8 ± 0.3 kg (8.33 ± 0.66 lb.) 4 m: 9.65 ± 0.3 kg (21.27 ± 0.66 lb.) 2.5 + 2.5 m: 11.75 ± 0.3 kg (25.9 ± 0.66 lb.)
Boom Pole Dimensions (with Package)	3 m: 250 × 90 × 3280 mm (9.84 × 3.54 × 129.13 inch) 4 m: 230 × 90 × 4300 mm (9.06 × 3.54 × 169.29 inch) 5 m: 140 × 90 × 5260 mm (5.51 × 3.54 × 207.09 inch)

Boom Pole Weight (with Package)	3 m: 9.56 ± 0.3 kg (21.07 ± 0.66 lb.) 4 m: 11.34 ± 0.3 kg (25 ± 0.66 lb.) 5 m: 13.64 ± 0.3 kg (30.07 ± 0.66 lb.)
Boom Pole Dimensions	3 m: 1261.5 × 92.5 × 3000 mm (49.67 × 3.64 × 118.11 inch) 4 m: 1261.5 × 92.5 × 4000 mm (49.67 × 3.64 × 157.48 inch) 5 m: 1261.5 × 92.5 × 5000 mm (49.67 × 3.64 × 196.85 inch)
Boom Pole Material	AL6061
Approval	
RF	CE-RED EN 300220-1 V3.1.1 EN 300220-2 V3.1.1 EN 301489-1 V2.2.3 EN 301489-3 V2.1.1 EN IEC 62311: 2020
EMC	CE-EMC : EN 55032: 2015/A11: 2020 + A1: 2020, EN IEC 61000-3-2: 2019/A1: 2021, EN 61000-3-3: 2013 + A1: 2019/A2: 2021, EN 50130-4: 2011+A1: 2014
Security	CE-LVD: EN 62368-1: 2014/A11: 2017 CB: IEC 62368-1: 2014 IEC 62368-1: 2018
Environment	ROHS
Protection	IP54, IK09
Package	
Barrier Housing Dimensions (L × W × H)	1060 × 370 × 262 mm (41.73 × 14.57 × 10.31 inch)
Body Weight	43 ± 3 kg (94.8 ± 6.61 lb.)
Body Dimensions (with Package, Without Boom Pole) (L × W × H)	1266 × 504 × 626 mm (49.84 × 19.84 × 24.65 inch)
Body Weight (with Package, Without Boom Pole)	47 ± 3 kg (103.61 ± 6.61 lb.)

▪ Dimension

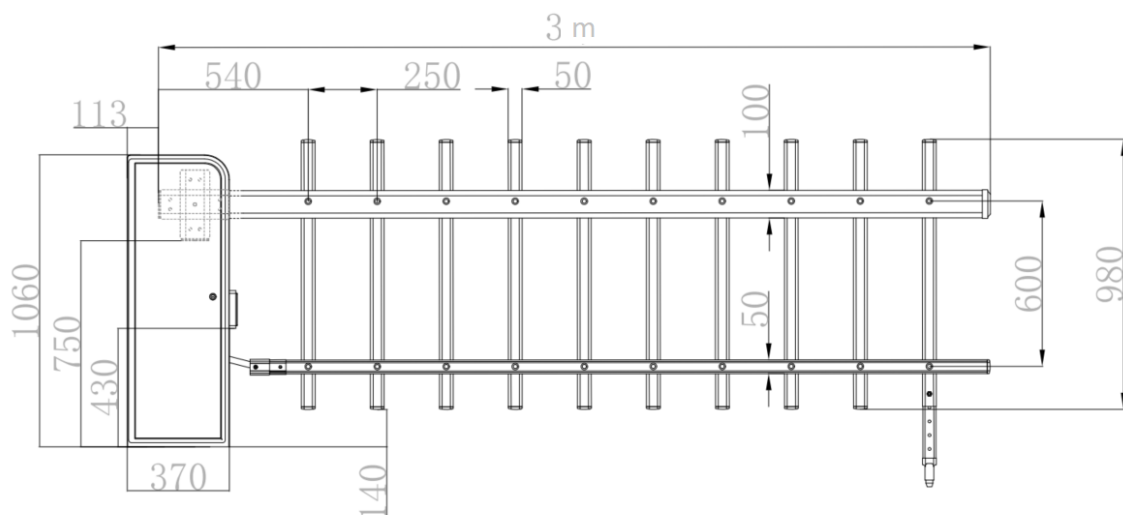

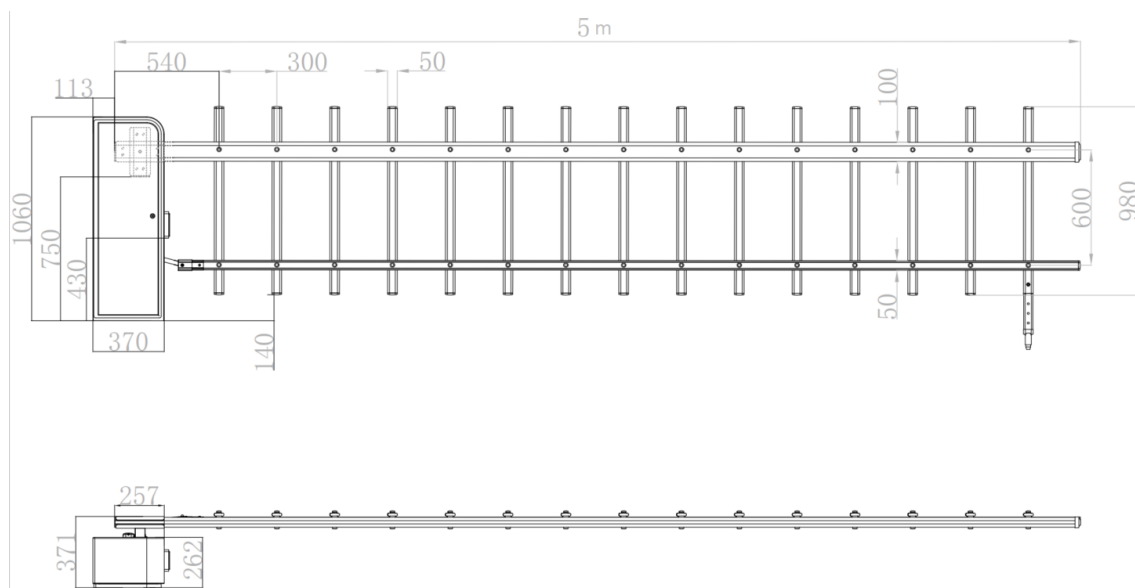

▪ **Accessory**

▪ **Included**

DS-TMG070/4B/4 2	DS-TMG012-5	DS-TMG004-5

▪ **Optional**

DS-TMG013-5	DS-TMG012-A1	DS-TMG022	DS-TMG023	DS-TVL221-1-6D
DS-TMG000-2-R(high speed)	DS-TMG000-2-R(low speed)	DS-TMG000-2-L(high speed)	DS-TMG000-2-L(low speed)	DS-TMG060-42

DS-TMG050	DS-TMG070/4B/42(24V)	TMG080-3
		

See Far, Go Further



www.hikvision.com
support@hikvision.com

