

## IPC-D140HAA-LU 4 MP Smart Hybrid Light 3.0 Fixed Dome Network Camera



- HikAI-ISP for well noise reduction, color correction and image quality improvement
- Motion Detection 3.0 detects persons and vehicles more accurately, reducing false alarms
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- Built-in microphone for real-time audio security
- Dust and water resistant (IP67) and vandal resistant (IK08)

## ▪ Specification

| Camera                      |                                                                                                                                        |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                | 1/3" Progressive Scan CMOS                                                                                                             |
| Max. Resolution             | 2688 × 1520                                                                                                                            |
| Min. Illumination           | Color: 0.003 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR                                                                                  |
| Shutter Time                | 1 s to 1/100,000 s                                                                                                                     |
| Day & Night                 | IR cut filter                                                                                                                          |
| Angle Adjustment            | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°                                                                                   |
| Lens                        |                                                                                                                                        |
| Lens Type                   | Fixed focal lens, 2.8 and 4 mm optional                                                                                                |
| Focal Length & FOV          | 2.8 mm, horizontal FOV 98°, vertical FOV 54°, diagonal FOV 115°<br>4 mm, horizontal FOV 79°, vertical FOV 42°, diagonal FOV 93°        |
| Lens Mount                  | M12                                                                                                                                    |
| Iris Type                   | Fixed                                                                                                                                  |
| Focus                       | NA                                                                                                                                     |
| Aperture                    | F1.6                                                                                                                                   |
| Depth of Field              | 2.8 mm: 1.4 m to ∞<br>4 mm: 1.5 m to ∞                                                                                                 |
| DORI                        |                                                                                                                                        |
| DORI                        | 2.8 mm, D: 63 m, O: 25 m, R: 12 m, I: 6 m<br>4 mm, D: 78 m, O: 31 m, R: 15 m, I: 7 m                                                   |
| Illuminator                 |                                                                                                                                        |
| Supplement Light Type       | IR, White Light                                                                                                                        |
| Supplement Light Range      | Up to 30 m                                                                                                                             |
| Smart Supplement Light      | Yes                                                                                                                                    |
| IR Wavelength               | 850 nm                                                                                                                                 |
| Video                       |                                                                                                                                        |
| Main Stream                 | 50 Hz: 25 fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720)<br>60 Hz: 24 fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720) |
| Sub-Stream                  | 50 Hz: 25 fps (1280 × 720 , 640 × 480, 640 × 360)<br>60 Hz: 24 fps (1280 × 720 , 640 × 480, 640 × 360)                                 |
| Third Stream                | NA                                                                                                                                     |
| Video Compression           | Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG                                                                  |
| Video Bit Rate              | 32 Kbps to 16 Mbps                                                                                                                     |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile                                                                                           |
| H.265 Type                  | Main Profile                                                                                                                           |
| Bit Rate Control            | CBR, VBR                                                                                                                               |
| Scalable Video Coding (SVC) | YES                                                                                                                                    |
| Region of Interest (ROI)    | 1 fixed regions for each stream                                                                                                        |
| Target Cropping             | NO                                                                                                                                     |
| Audio                       |                                                                                                                                        |
| Audio Type                  | Mono sound                                                                                                                             |
| Audio Compression           | -U: G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                           |

|                               |                                                                                                                                                                                                                        |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio Bit Rate                | -U:64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 160 Kbps (MP2L2)/8 to 160 Kbps (MP3)/16 to 64 Kbps (AAC-LC)                                                                                   |
| Audio Sampling Rate           | -U: 8 kHz/16 kHz                                                                                                                                                                                                       |
| Environment Noise Filtering   | -U: Yes                                                                                                                                                                                                                |
| <b>Network</b>                |                                                                                                                                                                                                                        |
| Protocols                     | DHCP,QoS,FTP,SSL/TLS,ICMP,RTSP,UDP,HTTPS,HTTP,DNS,IPv6,IPv4,IGMP,RTCP,RTP,DDNS,TCP/IP,UPnP,NTP,SMTP                                                                                                                    |
| Simultaneous Live View        | Up to 6 channels                                                                                                                                                                                                       |
| API                           | ISAPI,EZVIZ,ONVIF,ISUP,SDK                                                                                                                                                                                             |
| User/Host                     | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                     |
| Security                      | Password protection, complicated password, watermark, basic and digest authentication for HTTP, WSSE and digest authentication for Open Network Video Interface, security audit log, host authentication (MAC address) |
| Network Storage               | NO                                                                                                                                                                                                                     |
| Client                        | iVMS-4200,Hik-Connect                                                                                                                                                                                                  |
| Web Browser                   | Plug-in required live view: Chrome 91+, Firefox 88+, Edge 91+                                                                                                                                                          |
| <b>Image</b>                  |                                                                                                                                                                                                                        |
| Image Parameters Switch       | Yes                                                                                                                                                                                                                    |
| Image Settings                | Rotate mode,saturation,brightness,contrast,sharpness,gain,white balance,AGC,adjustable by client software or web browser                                                                                               |
| Day/Night Switch              | Day,Night,Auto,Schedule                                                                                                                                                                                                |
| Wide Dynamic Range (WDR)      | 120 dB                                                                                                                                                                                                                 |
| SNR                           | ≥ 52 dB                                                                                                                                                                                                                |
| Image Enhancement             | BLC,HLC,3D DNR                                                                                                                                                                                                         |
| Privacy Mask                  | 4 programmable polygon privacy masks                                                                                                                                                                                   |
| <b>Interface</b>              |                                                                                                                                                                                                                        |
| Ethernet Interface            | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                          |
| On-Board Storage              | NA                                                                                                                                                                                                                     |
| Built-in Microphone           | Yes,1 built-in microphone                                                                                                                                                                                              |
| Built-in Speaker              | NA                                                                                                                                                                                                                     |
| Audio                         | NA                                                                                                                                                                                                                     |
| Alarm                         | NA                                                                                                                                                                                                                     |
| Reset Key                     | NA                                                                                                                                                                                                                     |
| <b>Event</b>                  |                                                                                                                                                                                                                        |
| Basic Event                   | Video tampering alarm,motion detection (support alarm triggering by specified target types (human, vehicle)),exception                                                                                                 |
| Smart Event                   | NO                                                                                                                                                                                                                     |
| Linkage                       | Upload to FTP/memory card,notify surveillance center, send email, trigger recording, trigger capture                                                                                                                   |
| <b>Deep Learning Function</b> |                                                                                                                                                                                                                        |
| Perimeter Protection          | NO                                                                                                                                                                                                                     |
| Face Capture                  | NO                                                                                                                                                                                                                     |

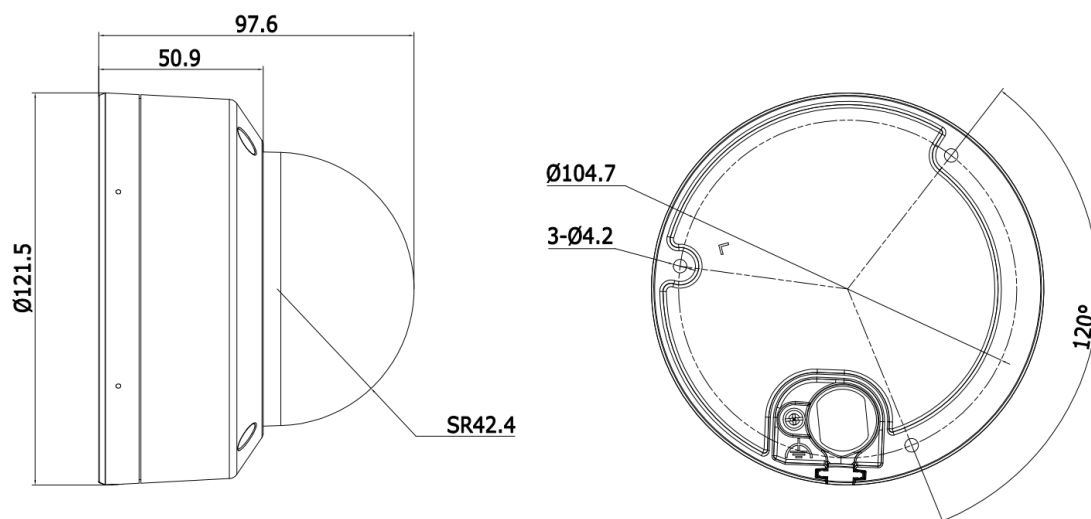
| General                          |                                                                                                                                                    |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Power                            | 12 VDC $\pm$ 25%, 0.5 A, max. 6 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection,<br>PoE: IEEE 802.3af, Class 3, max. 7.5 W |
| Material                         | Base: Metal, cover: Plastic                                                                                                                        |
| Dimension                        | $\varnothing$ 121.5 mm $\times$ 97.6 mm ( $\varnothing$ 4.78" $\times$ 3.84")                                                                      |
| Package Dimension                | 150 mm $\times$ 150 mm $\times$ 141 mm (5.91" $\times$ 5.91" $\times$ 5.55")                                                                       |
| Weight                           | -LU: Approx. 480 g (1.06 lb.)                                                                                                                      |
| With Package Weight              | -LU: Approx. 635 g (1.40 lb.)                                                                                                                      |
| Storage Conditions               | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                          |
| Startup and Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                          |
| Language                         | English, Russian, Ukrainian, Arabic, Spanish, French, Portuguese, Turkish, Polish, German                                                          |
| General Function                 | Heartbeat, mirror, password reset via email, password protection, anti-banding                                                                     |
| Flashing Light                   | NA                                                                                                                                                 |
| Approval                         |                                                                                                                                                    |
| EMC                              | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021                           |
| Safety                           | CB: IEC 62368-1:2014+A11,<br>CE-LVD: EN 62368-1:2014/A11:2017                                                                                      |
| Environment                      | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006                                                                   |
| Protection                       | IP67: IEC 60529-2013                                                                                                                               |

## ▪ Available Model

IPC-D140HAA-LU(2.8mm)

IPC-D140HAA-LU(4mm)

## ▪ Dimension













Unit: mm

▪ Accessory

▪ Optional

| DS-1275ZJ-SUS | DS-1280ZJ-DM46   | DS-1271ZJ-120  | DS-1275ZJ-S-SUS  | DS-1276ZJ-SUS |
|---------------|------------------|----------------|------------------|---------------|
|               |                  |                |                  |               |
| DS-1475ZJ-SUS | DS-4221ZJ-WC     | DS-1272ZJ-120B | DS-220AZJ-130-WA | DS-1476ZJ-SUS |
|               |                  |                |                  |               |
| DS-1272ZJ-120 | DS-220AZJ-145-WA |                |                  |               |
|               |                  |                |                  |               |

▪ Installation Methods

|                                                                                     |                                                                                     |                                                                                    |                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Vertical Pole Mounting</b><br><b>DS-1275ZJ-SUS+DS-1272ZJ-120</b>                 | <b>Vertical Pole Mounting</b><br><b>DS-1275ZJ-S-SUS+DS-220AZJ-130-WA</b>            | <b>Vertical Pole Mounting</b><br><b>DS-1475ZJ-SUS+DS-220AZJ-130-WA</b>             | <b>Junction Box</b><br><b>DS-1280ZJ-DM46</b>                                        | <b>Pendant Mounting</b><br><b>DS-1271ZJ-120</b>                                      |
|    |    |   |   |   |
| <b>Corner Mounting</b><br><b>DS-1276ZJ-SUS+DS-1272ZJ-120+DS-1253ZJ-M</b>            | <b>Corner Mounting</b><br><b>DS-1476ZJ-SUS+DS-220AZJ-130-WA</b>                     | <b>In-Ceiling Mounting</b><br><b>DS-4221ZJ-WC</b>                                  | <b>Wall Mounting</b><br><b>DS-1272ZJ-120B+DS-1280ZJ-DM46</b>                        | <b>Wall Mounting</b><br><b>DS-220AZJ-130-WA</b>                                      |
|   |   |  |  |  |
| <b>Wall Mounting</b><br><b>DS-1272ZJ-120</b>                                        | <b>Wall Mounting</b><br><b>DS-220AZJ-145-WA</b>                                     |                                                                                    |                                                                                     |                                                                                      |
|  |  |                                                                                    |                                                                                     |                                                                                      |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

# HiLook