

DS-UPS600-R/X UPS



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection





▪ Specification

Power	
UPS Capacity	600 VA / 360 W
Input	
Input Voltage Range	81 VAC to 134VAC (110V) 89 VAC to 145VAC (120V)
Input Frequency	50/60 Hz self-adaptive
Plug Type	Type B (NEMA 5-15)
Output	
Output Voltage Range	110/120VAC $\pm$ 10%
Output Frequency	50/60 Hz $\pm$ 0.5 Hz self-adaptive
Transfer Time	$\leq$ 10 ms
Waveform	Simulated Sinewave
Outlet Type	Type B (NEMA 5-15)
Outlet Number	Battery outlet*4 & Bypass*2
Battery	
Battery Type	12 V/7 Ah x 1, lead-acid battery
Recharge Time	4-6 hours recover to 90% capacity
Typical Backup Time	Run time at 100w: 15-20 min
Interface	
Communicate Ports	No
Protection	
Full Protection	Surge protection, Overload protection, Discharge protection, Short circuit protection
Indicator	
Display	LED indicator Line mode: Solid green led lighting Battery mode: Solid yellow led flash Fault mode: Solid red led lighting
Alarm	Battery mode: Sounding every 10 seconds. Low battery : Sounding every second. Over load : Sounding every 0.5 seconds. Fault: Continuously sounding.
General	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	0% to 90% (non-condensing)
Dimension	276.1 mm $\times$ 101 mm $\times$ 142 mm (10.9" $\times$ 3.98" $\times$ 5.59")
Weight	4.41kg

▪ Available Model

DS-UPS600-R/X

▪ Dimension

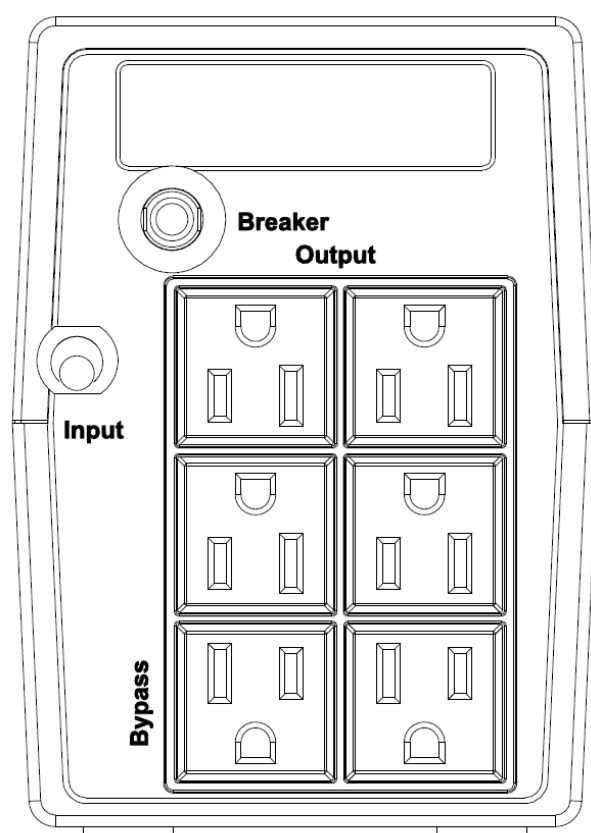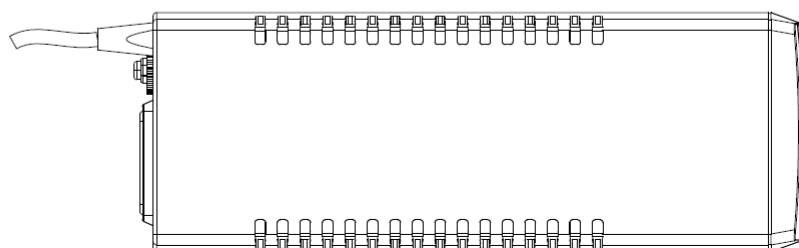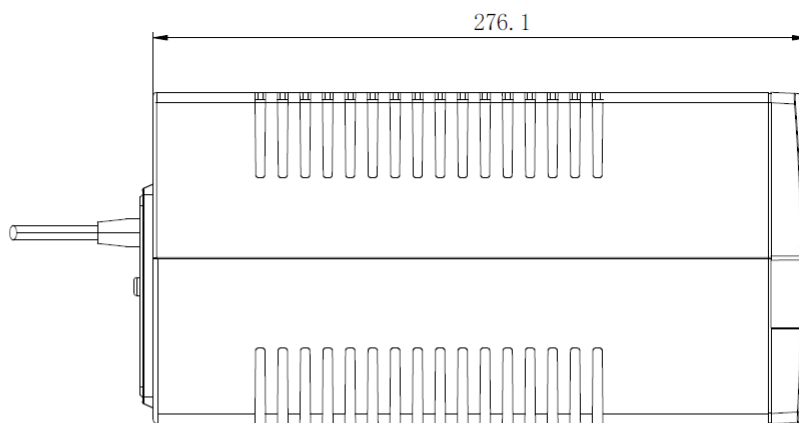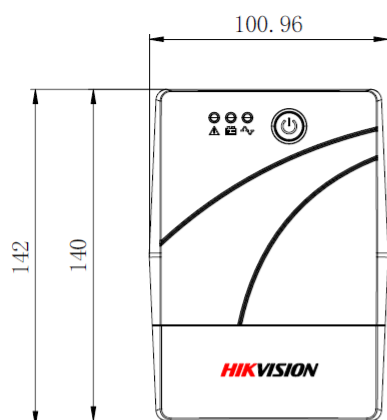

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq