

DS-3WR15X-H(O-STD)/US AX1500 Wireless Router



- 1500Mbps Wi-Fi 6
- Wired Wireless Dual Gigabit
- Dual Band in One and 5G First
- Hikvision Mesh Supported
- Roaming Support
- APP Management

▪ Specification



General	
Product Dimensions (W × H × D)	241.3mm*140.8mm*156.8mm
Package Dimensions (W × H × D)	390mm*310mm*54mm
Net Weight	0.332kg
Gross Weight	0.85kg
Packing List	1500Mbps Wi-Fi6 Router x 1 Power Supply Adaptor x 1 CAT5e Network Cable x 1 Quick Start Guide x 1 Regulatory Compliance and Safety Information x 1 Product Flyer x 1
Packing Method	Single pack
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% to 90% RH non-condensing
Storage Humidity	5% to 95% RH non-condensing
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Installation Mode	Desk-Mounted
Wireless Parameter	
Max. Wi-Fi Speed	≤ 1501 Mbps 5GHz: 1201Mbps 2.4GHz: 300Mbps
Wireless Standard	IEEE 802.11a/n/ac/ax @5GHz, IEEE 802.11b/g/n @2.4GHz
Wireless Range	Up to 1300 ft ² /120 m ² (Recommend coverage for home use, actual Wi-Fi range varies depending on the layout and wall materials)
Working Frequency Band	2.4 GHz , 5 GHz
Max. Connections	128
Recommended Connections	50
Transmitting Power	CE : < 20 dBm(2.4GHz) < 23 dBm(5GHz)
Wireless Features	MU-MIMO Supported, Beamforming Supported, OFDMA Supported
Antenna	5 high gain antennas
Antenna Gain	5 dBi
Receiving Sensitivity	5 GHz : -90 dBm@HE80-MCS0 -59 dBm@HE80-MCS11 2.4GHz : -75 dBm@HT40-MCS0 -93.5 dBm@HT40-MCS7
Hardware Parameter	
Network Interface	1 × 10/100/1000 Mbps Adaptive WAN Port, 3 × 10/100/1000 Mbps Adaptive LAN Port
LED Indicator	Red/blue for different working states, flashing mode


Button	Reset/WPS Button
RAM	128MB DDR2
ROM	128M NAND
Power Supply Method	Power Supply Adapter
Power Specifications	DC 12 V, 1 A
Max. Power Consumption	≤8.5 W
Software Function	
Operating Mode	Router Mode Wireless Extender Mode Access Point Mode
WAN Mode	DHCP,Static IP,PPPoE
DHCP	DHCP Client List DHCP Server
Parental Control	Speed Limit,Internet Access Period,Filter URL,Custom Profiles,Parental Control
Security Mechanism	Support fast and secure WPS connection Support hiding wireless network name Support controlling terminal network connection Support firewalls Login Authentication
IP Version	IPv4 IPv6
Firewall	Forbid TCP SYNC flood attack,Forbid ICMP flood attack
NAT Forwarding	Port Mapping DMZ UPnP
DDNS	Oray, No-IP,DynDNS
VPN	PPTP Server,L2TP Server,PPTP Client,L2TP Client,OpenVPN Server,OpenVPN Client
Others	IGMP,Quick Diagnosis,WIFI Optimization,Ping/Tracert
Security Mode	WPA2-PSK,WPA/WPA2-PSK,WPA2-PSK/WPA3-SAE
MESH	Hikvision Mesh
Management Method	Web Control: PC, mobile App Control: HPP, HC TR069(TR098/TR181)
Upgrade	Web Upgarde App Cloud Upgrade Auto Upgrade
System Log	System log
Roaming	802.11k/v

▪ Available Model

DS-3WR15X-H/US

▪ Dimension

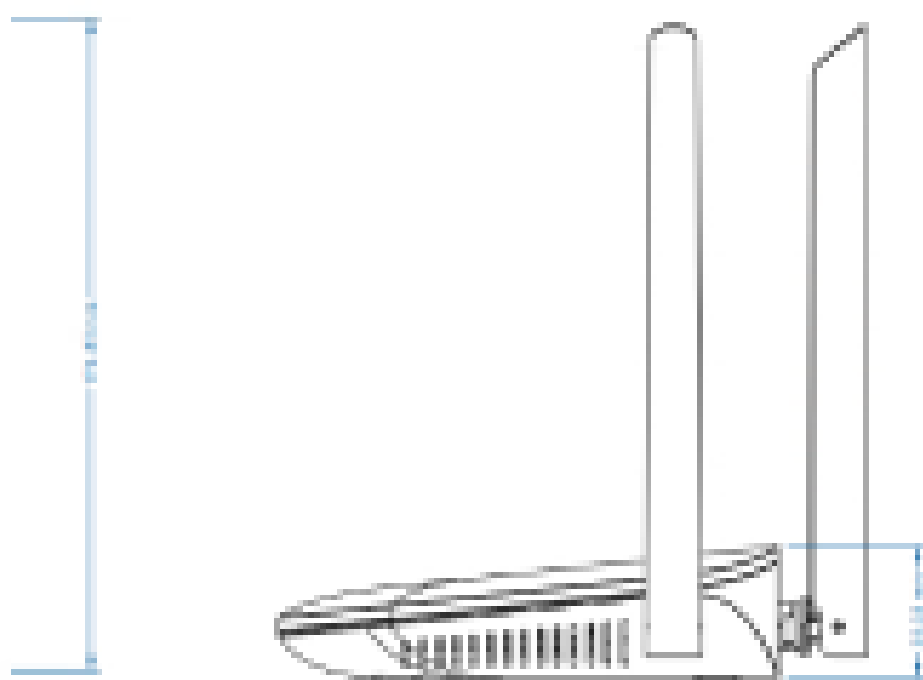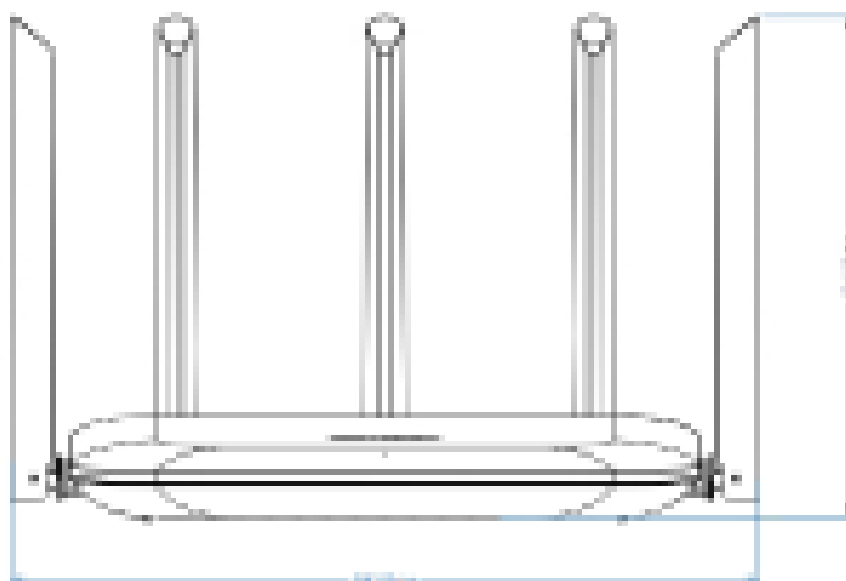

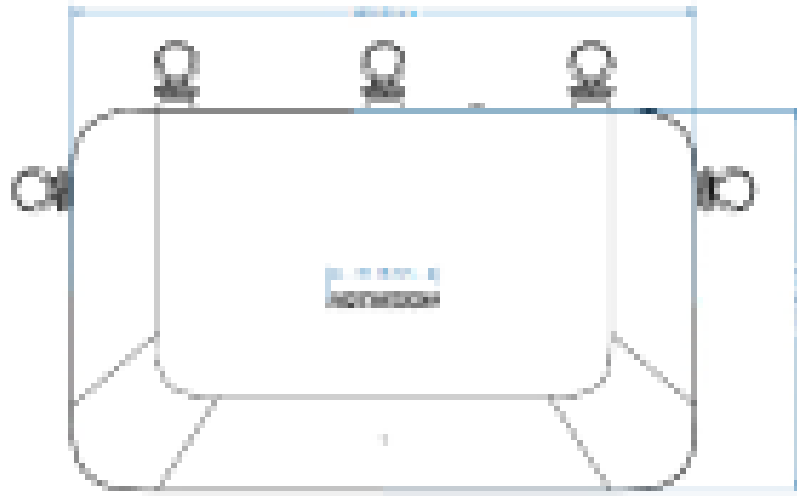

See Far, Go Further



www.hikvision.com
support@hikvision.com

