

DHI-HY-1410E

Addressable Input/Output Module



- Convenient wiring: two-wire, polarity-free
- Reliable communication: built-in microprocessor, stable performance
- Ultra-low power consumption: ultra-low monitoring current and operating current
- Simple installation: with a plug-in structure, easy to install and construct
- CE certified

System Overview

DHI-HY-1410E Addressable Input / Output Module is a mated product of the Addressable Fire Alarm Control Panel, regulating the normal operation of external fire protection device. It can realize an output control for fire linkage equipment and receive the feedback signals of the fire linkage equipment to monitor the normal operation of the fire linkage equipment. It can be connected with relays, electromagnetic valves, fire pumps, fire fans and other fire equipment that require 24V DC to start.

Functions

Input detection

Monitor status of passive, normally open on-off pieces of equipment, i.e., fire damper, flow indicator, pressure switch, and signal valves.

Fast response

When there is a fire alarm, the signal is sent to the control panel within 1 second.

Output control

Active output port, DC24V/40mA pulse output.

Input check mode

Input check mode is available. Enable Input Check Mode by default.

Output check mode

Output check mode is available. Enable Output Check Mode by default.

Scene

It is suitable for places with automatic fire alarm systems, fire emergency broadcasting systems, and background music systems, such as shopping malls, hotels, schools, factories and other civil or industrial buildings.

Technical Specification

Electrical

Working Voltage	24V DC
Current	Monitoring current: $\leq 150\mu\text{A}$ Operating current: $\leq 45\text{mA}$
Capacity of the Output Contact	DC24V/40mA
Indicator	• Input indicator: Red LED flashes once every 6 seconds, and flashes once every 2 seconds when malfunctioned, remains lit after receiving feedback • Output indicator: Red LED is constantly off when works normally, and flashes once every 2 seconds when malfunctioned, remains lit after receiving start signal

Communication

Wiring	Two-wire, polarity-free
Addressing Method	Electrical encoder
Address Range	1–254
Communication Distance	$\leq 1500\text{ m}$


Environment

Operating Temperature	-10°C to $+55^{\circ}\text{C}$ ($+14^{\circ}\text{F}$ to $+131^{\circ}\text{F}$)
Storage Temperature	-20°C to $+65^{\circ}\text{C}$ (-4°F to $+149^{\circ}\text{F}$)
Operating Humidity	$\leq 95\% \text{ RH}$ (no condensation)


Construction

Color	White
Dimensions (with base)	90 mm $\times$ 90 mm $\times$ 37 mm (2.7" $\times$ 2.7" $\times$ 1.1")
Weight (with base)	95 g (0.21 lb)
Certifications	CE

Installation

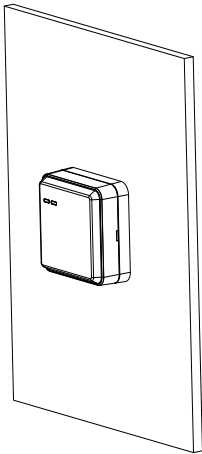

Dimensions (mm/inch)

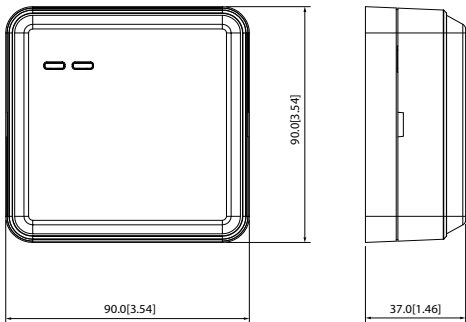

Ordering Information		
Type	Model	Description
Addressable Input / Output Module	DHI-HY-1410E	Addressable Input / Output Module
Accessories	DHI-HY-MKDZ2	Input / Output Module Base