

DHI-ISC-M65-EC10

Extension Roller Table, 1m



- Removable safety roller.
- Stainless steel roller.
- Supports cascade connection between extension conveyors.
- High-strength frame, maximum load is 200kg.
- Supports installation at the entrance or exit of the security screening machine.

System Overview

Security Screening Machine Specific Extension Roller Table.

It is suitable for the security screening machine with the tunnel of 65cm width, such as DHI-ISC-M6550 or DHI-ISC-M6550D.

Scene

Suitable for baggage security screening in airport, railway station, bus station, metro, rail transit, government building, exhibition center, large events and more.

Technical Specification

General parameters


Max. Load	200 kg (440.92 lb), evenly distributed
Roller Table Length	1000 mm (39.37")

Regular Parameters

Roller Material	Stainless steel
Roller Diameter	50 mm (1.97")
Load of Single Roller	70 kg (1,014.12 lb)
Roller Distance	55 mm (2.16")
Conveyor Height	660 mm–780 mm (25.98"–30.71")
Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)
Operating Humidity	<95% (RH), non-condensing
Product Dimensions	1027 mm × 727 mm × 688 mm (40.43" × 28.62" × 27.09")
Packaging Dimensions	1235 mm × 1050 mm × 450 mm (48.62" × 41.33" × 17.72")
Net Weight	60 kg (132.27 lb)
Gross Weight	95 kg (209.44 lb)
Installation	Ground mount

Ordering Information		
Type	Model	Description
Extension Roller Table	DHI-ISC-M65-EC10	Extension Roller Table, width 65cm , length 1m

Installation

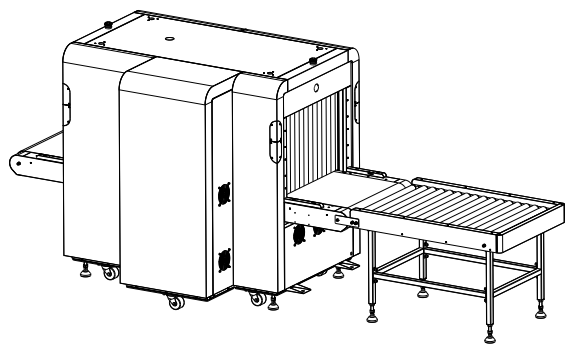

Dimensions (mm[inch])

