


IPMECD-0153-LM45

Barrier Rod

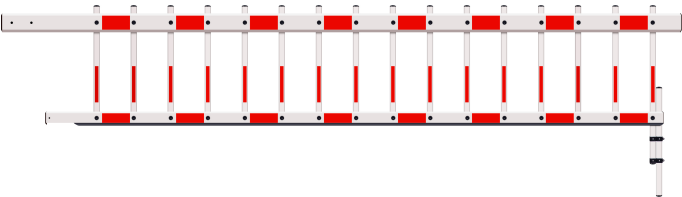

Series Overview

Constructed from highly durable aluminum alloy, the Barrier Rod features an advanced anti-rust coating on its surface. Additionally, it is equipped with an elastic anti-collision rubber strip at the bottom for added protection.

Technical Specification

Basic	
Color	Mixed with red and white
Matched Product	DHI-IPMECD-105X series
General	
Operating Temperature	−35 °C to +65 °C (−31 °F to +149 °F)
Storage Temperature	−35 °C to +65 °C (−31 °F to +149 °F)
Operating Humidity	10%–90% (RH), non-condensing
Storage Humidity	10%–90%, non-condensing
Casing Material	Metal (Aluminum)
Product Dimensions	4,500.0 mm × 500.0 mm × 45.0 mm (177.17" × 19.69" × 1.77") (L × W × H)
Packaging Dimensions	4,850.0 mm × 250.0 mm × 120.0 mm (190.94" × 9.84" × 4.72") (L × W × H)
Net Weight	12.5 kg (27.55 lb)
Gross Weight	12.9 kg (28.44 lb)
Installation	It can be Installed on the boom gate.

Ordering Information

Type	Model	Description
Barrier Rod	IPMECD-0153-LM45	Barrier Rod

- 4.5 m fence arm that can be used on the left side of the boom gate.
- Made of aluminum alloy, and designed with an anti-rust case that was treated with electrostatic spray.
- Elastic anti-smashing rubber strip at the bottom.

Dimensions (mm[inch])

