


DHI-HY-BM41I

Isolation Base



- Reliable communication: Completes EMC test, it has strong anti-electromagnetic interference ability, high stability and reliability
- Flexible installation: Non-loosening screws on base terminal for easy installation
- High endurance: Contacts material is highly acid-resistant and rust-resistant

System Overview

DHI-HY-BM41I Isolation Base is a mated product of Addressable Input Module & Input / Output Module. When installed in addressable module, the isolation base automatically isolates short-circuited device, ensuring the normal operation of other devices in the circuit.


Scene

It is suitable for residential and industrial buildings such as hotels, shopping malls, hospitals, office buildings, schools, banks, libraries, factories, and warehouses.

Technical specification

Compatible Model	Addressable Input Module Addressable Input / Output Module
Working Voltage	DC 16V-28V
Dimensions	90.3 mm×90.3 mm×19 mm (3.55" × 3.55" × 0.75")
Weight	67 g (0.148 lb)
Installation	Wall mount
Color	White
Operating Temperature	−10°C to +50°C (+14°F to +122°F)
Storage Temperature	−20°C to +65°C (−4°F to +149°F)
Operating Humidity	≤ 95% RH (no condensation)

Dimensions (mm/inch)

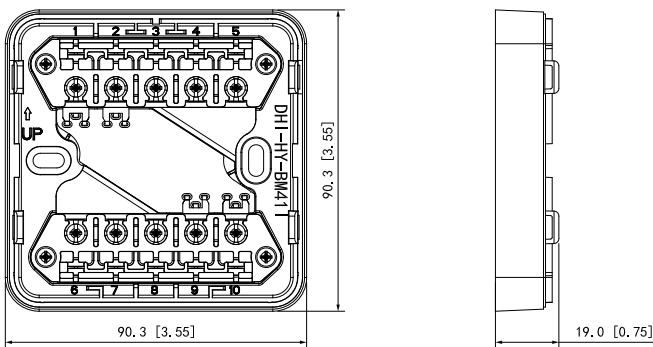

Ordering Information

Type	Model	Description
Isolation Base	DHI-HY-BM41I	Isolation Base