

DS-2CD3H67G3-LIZSUY/SL

6 MP Dual Illumination Strobe Light and Audible Warning Motorized Varifocal Turret

ColorVu 3.0

AcuSense 3.0



Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

Hikvision Darkfighter 2.0 technology provides 24/7 vivid colorful images with F1.2 advanced lenses, high performance sensors and friendly lighting. F1.2 super-aperture collects more light to produce brighter images. Advanced sensor technology can vastly improve the utilization of available light.

- HIK AI-ISP for excellent noise reduction effect
- 24/7 colorful imaging via ColorVu technology
- 130 dB WDR, support Auto mode, clear imaging against strong back light
- AcuSense: Focus on person and vehicle classification based on deep learning
- Smart Hybrid Light: Integrates IR and White lights, 3 supplemental lighting modes
- Motorized varifocal lens for easy installation and monitoring
- Built-in arrayed dual-microphone for real-time high quality audio security
- /SL: Active strobe light and audio alarm to warn intruders off
- Water and dust resistant (IP67) and vandal resistant (IK10)
- -Y: Anti-corrosion design, providing reliability and longevity compared to standard (NEMA 4X)

▪ Specification

Camera	
Image Sensor	1/1.8" Progressive Scan CMOS
Max. Resolution	3200 × 1800
Min. Illumination	Color: 0.001 Lux @ (F1.2, AGC ON), 0 Lux with light
Shutter Time	1 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	DS-2CD3H67G3-LIZSUY/SL: Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360° Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°
Lens	
Lens Type	Varifocal lens, motorized lens, 2.7 to 13.5 mm
Focal Length & FOV	2.7 to 13.5 mm, horizontal FOV 112.3° to 41.2°, vertical FOV 58.1° to 23.1°, diagonal FOV 137.4° to 47.3°
Lens Mount	Integrated
Iris Type	Auto-iris
Aperture	Max. F1.2
Depth of Field	1 m to ∞
DORI	
DORI	Wide: D: 74.3 m, O: 29.5 m, R: 14.9 m, I: 7.4 m Tele: D: 183.3 m, O: 72.8 m, R: 36.7 m, I: 18.3 m
Illuminator	
Supplement Light Type	IR, White Light
Supplement Light Range	IR: up to 40 m White Light: up to 40 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
HEOP	
Open Resources	DS-2CD3H67G3-LIZSUY/SL: Memory: 40 MB, Smart RAM: 450 MB, eMMC: 2 GB DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B 海外标配海康 黑, DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B) 海外标配: NA DS-2CD3H67G3-LIZSUY/SL(2.7-13.5) 海外标配海康 黑, DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标配): Memory: 40 MB, Smart RAM: 450 MB, eMMC: 2 GB
Computing Power	DS-2CD3H67G3-LIZSUY/SL: 1.5 TOPS DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B 海外标配海康 黑, DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B) 海外标配: NA DS-2CD3H67G3-LIZSUY/SL(2.7-13.5) 海外标配海康 黑, DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标配): 1.5 TOPS

Open Capability	DS-2CD3H67G3-LIZSUY/SL:HEOP 2.0 OpendevSDK DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:NA DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康 黑,DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标 配),DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康黑:HEOP 2.0 OpendevSDK
Deep Learning Structure	DS-2CD3H67G3-LIZSUY/SL:Caffe,PyTorch,TensorFlow,PaddlePaddle,ONNX DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康 黑,DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标 配),DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康 黑:Caffe,PyTorch,TensorFlow,PaddlePaddle,ONNX DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:NA
Programming Language	DS-2CD3H67G3-LIZSUY/SL:C,C++ DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:NA DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康 黑,DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标 配),DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康黑:C,C++
Video	
Main Stream	50 Hz: 25 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
Sub-Stream	DS-2CD3H67G3-LIZSUY/SL:50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360) 60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360) DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康黑:50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360) 60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360) DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康 黑,DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标配):50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360) 60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360) DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:50 Hz: 25 fps (1280 × 720, 768 × 432, 640 × 360) 60 Hz: 30 fps (1280 × 720, 768 × 432, 640 × 360)
Third Stream	50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) 60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)
Fourth Stream	50 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360) 60 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)

Video Compression	Main stream: H.265/H.264/H.264+/H.265+, Sub-stream: H.265/H.264/MJPEG, Third stream: H.265/H.264, Fourth stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR, VBR
Scalable Video Coding (SVC)	H.264 and H.265 encoding
Region of Interest (ROI)	5 fixed regions for main stream and sub-stream
e-PTZ	Support Patrol and Auto Tracking settings
AI Encoding	DS-2CD3H67G3-LIZSUY/SL:NA DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康 黑, DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标 配), DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康黑:NA DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:Yes
Audio	
Audio Type	Mono sound
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/48 kHz
Environment Noise Filtering	Yes
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets, SRTP, SFTP
Simultaneous Live View	Up to 6 channels
API	ISAPI, SDK, ISUP, ONVIF (Profile S, Profile T, Profile G, Profile M)
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.1/1.2/1.3, host authentication (MAC address)
Network Storage	NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR)
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	Plug-in free live view: Chrome 91+, Firefox 88+, Edge 91+, Safari 13+ Local service: Chrome 91+, Firefox 88+, Edge 91+
Image	
Image Parameters Switch	Yes
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser
Day/Night Switch	Day, Night, Auto, Schedule

Wide Dynamic Range (WDR)	130 dB
SNR	≥ 52 dB
Image Stabilization	EIS
Image Enhancement	BLC,HLC,3D DNR,Distortion Correction,Defog
Privacy Mask	8 programmable polygon privacy masks
Transducer	
Transducer Type	NA
Detection Angle	NA
Detection Range	NA
Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Built-in Speaker	Max. power consumption: 2 W, max. sound pressure level: 10 cm: 97 dB.
Audio	Built-in Microphone: Arrayed dual-microphone, 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium, 1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium
Alarm	2 inputs, 2 outputs (max. 24 VDC/24 VAC, 1 A)
Reset Key	Yes
Power Output	12 VDC, max. 100 mA
Event	
Basic Event	DS-2CD3H67G3-LIZSUY/SL:Motion detection (support alarm triggering by specified target types (human and vehicle)),video tampering alarm,exception DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:Motion detection (support alarm triggering by specified target types (human and vehicle and animal)),video tampering alarm,exception DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康黑,DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标配),DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康黑:Motion detection (support alarm triggering by specified target types (human and vehicle)),video tampering alarm,exception
Smart Event	Scene change detection,audio exception detection,defocus detection
Linkage	Upload to FTP/NAS/memory card,notify surveillance center,send email,trigger alarm output,trigger recording,trigger capture,audible warning,strobe light

Deep Learning Function	
Perimeter Protection	DS-2CD3H67G3-LIZSUY/SL:Line crossing, intrusion, region entrance, region exiting Support alarm triggering by specified target types (human and vehicle) DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:Line crossing, intrusion, region entrance, region exiting Support alarm triggering by specified target types (human and vehicle and animal), people gathering, fast moving, parking, unattended baggage, object removal, combined event DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康黑,DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标配),DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康黑:Line crossing, intrusion, region entrance, region exiting Support alarm triggering by specified target types (human and vehicle)
Face Capture	Yes
People Counting	Yes
General	
Power	12 VDC $\pm$ 25%, 1.4 A, max. 16.8 W, 2-core terminal block, reverse polarity protection, PoE: IEEE 802.3at, Class 4, max. 20 W
Material	DS-2CD3H67G3-LIZSUY/SL:Base: Metal, cover: Metal Base: Metal, cover: Metal
Dimension	$\varnothing$ 143.5 mm $\times$ 142.7 mm ($\varnothing$ 5.7" $\times$ 5.6")
Package Dimension	170 mm $\times$ 170 mm $\times$ 225 mm (6.7" $\times$ 6.7" $\times$ 8.9")
Weight	Approx. 1265 g (2.8 lb.)
With Package Weight	Approx. 1530 g (3.4 lb.)
Storage Conditions	-30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)
Language	33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian
General Function	Heartbeat, mirror, flash log, password reset via email, pixel counter, anti-banding
Flashing Light	Yes, White Light
Approval	
EMC	CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, RCM: AS/NZS CISPR 32: 2015
Safety	CB: IEC 62368-1: 2014+A11
Environment	CE-RoHS: 2011/65/EU, NEMA 4X (NEMA 250-2018)
Protection	IP67: IEC 60529-2013, IK10: IEC 62262:2002
AE Parameters	
红外灯数量	3pcs

ROM和RAM	DS-2CD3H67G3-LIZSUY/SL:ROM: 8GB RAM: 1GB DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)海外标配海康黑,DS-2CD3H67G3-LIZSUY/SL(2.7-13.5mm)(海外标配),DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)B海外标配海康黑:ROM: 8GB RAM: 1GB DS-2CD3H67G3-LIZSUY/SL(2.7-13.5)(B)海外标配:ROM: 512MB RAM: 1GB
浪涌参数	Power (12 VDC): 2KV PoE: 4KV
恒定光圈	F1.2
聚焦方式(focus control modes)	auto
ABF	NA
ICR蓝玻璃 (blue glass module)	支持
内插 (Connector panel)	DS-2CD3H67G3-LIZSUY/SL:支持 支持
螺丝材质 (Screw material)	SUS304


▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has MODERATE PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

▪ Dimension

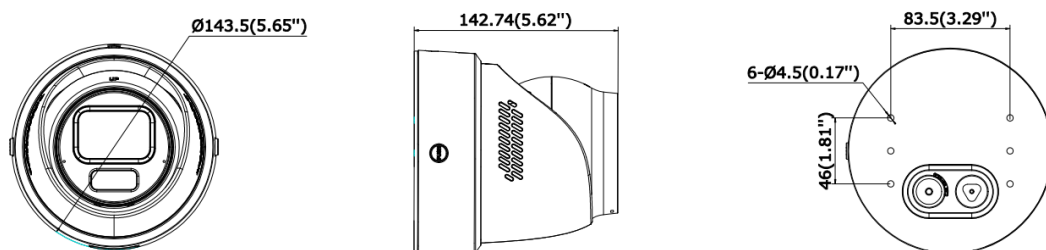


Unit: mm(inch)

▪ Accessory

▪ Optional

DS-1475ZJ-SUS	DS-1476ZJ-SUS	DS-1273ZJ-140B-Y	DS-1273ZJ-140-Y	DS-1271ZJ-140-Y
				

▪ Installation Methods

Vertical Pole Mounting DS-1475ZJ-SUS+DS-1253ZJ-L+DS-1273ZJ-140B-Y	Corner Mounting DS-1476ZJ-SUS+DS-1253ZJ-L+DS-1273ZJ-140B-Y	Wall Mounting DS-1273ZJ-140B-Y	Wall Mounting DS-1273ZJ-140-Y	Pendant Mounting DS-1271ZJ-140-Y
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

