

DH-PFB603W-B

Wall Mount Bracket



- Built of aluminum alloy.
- Supports being adjusted 360° horizontally and between -30° to 0° vertically.
- Compatible with DH-PFH600 and DH-PFH510 Series Housing.



Series Overview

Dahua Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, and works in temperatures ranging from -40 °C to +60 °C (-40 °F to +140 °F) and in environments with a relative humidity of less than 90%.

Technical Specification

Structure


Casing Material	Aluminum alloy
Product Dimensions	193.0 mm × 69.7 mm × 89.2 mm (7.60" × 2.70" × 3.51") (L × W × H)
Appearance Color	Black
Net Weight	0.28 kg (0.62 lb)
Gross Weight	0.36 kg (0.79 lb)
Load Bearing	3.0 kg (6.61 lb)
Installation	Wall mount
Adjustable Inclination Angle	-30°-0°
Rotation Angle	0°-360°

Applicable Model	Please see "Camera Accessories Selection"
Packaging Dimensions	204 mm × 96 mm × 76 mm (8.03" × 3.78" × 2.99") (L × W × H)
Environment	
Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	<90% (RH)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	10%-90% (RH)
Anti-corrosion Level	Basic Protection


Ordering Information

Type	Model	Description
Camera Mount	DH-PFB603W-B	Wall Mount Bracket

Installation

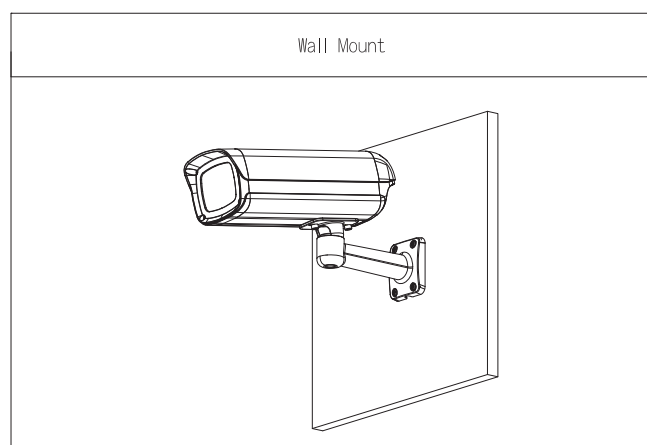

Dimensions (mm[inch])

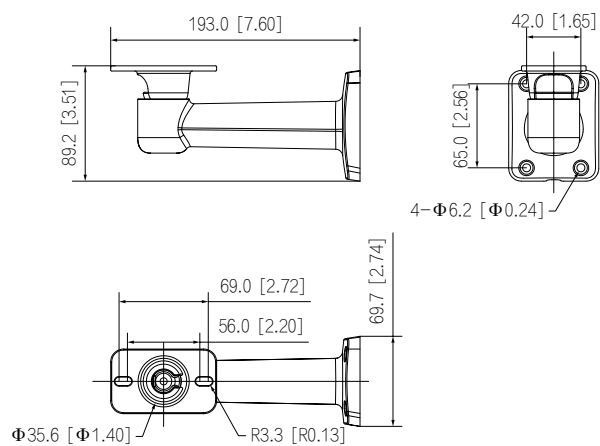

Package Information

- Wall mount bracket × 1
- M6×10 screw × 2
- ST4.2×25 screw × 4
- Plastic anchor × 4
- S5.0 wrench × 1