

## **DS-3E1309P-EI/M(B)** **8 Port Fast Ethernet Smart PoE Switch**



Smart managed switches are developed by Hikvision, featuring easy management and maintenance. You can easily deploy, monitor and expand your surveillance system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.


- 8 × 10/100 Mbps PoE ports, 1 × Gigabit RJ45 port
- Total PoE Power Budget 80 W
- Support 802.1Q VLAN
- Support PoE watchdog to detect and restart the cameras that do not respond
- Support STP/RSTP loop prevention
- Support cable detection to locate failure
- Up to 300 m Long Range PoE Transmission
- 6 kV Surge Protection

## ▪ Specification

| General                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shell                     | Metal material, fan-free design                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Net Weight                | 0.4 kg (0.9 lb)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Gross Weight              | 0.9 kg (2.0 lb)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimensions (W × H × D)    | 170.00 mm × 27.60 mm × 93.10 mm (6.69" × 1.09" × 3.67")                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Operating Temperature     | 0 °C to 40 °C (32 °F to 104 °F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Storage Temperature       | -40 °C to 85 °C (-40 °F to 185 °F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Operating Humidity        | 5% to 95% (no condensation)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Relative Humidity         | 5% to 95% (no condensation)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power Supply              | 54 V DC, 1.6 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Installation Mode         | Desk-Mounted, Wall-Mounted                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Max. Power Consumption    | 85 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Power Consumption in Idle | 5 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Surge Protection          | 6 kV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Network Parameters        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Ports                     | 8 × 10/100 Mbps PoE port, 1 × Gigabit RJ45 port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| MAC Address Table         | 8 K                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Switching Capacity        | Whole-Device Performance: 5.6 Gbps<br>Port Performance: 3.6 Gbps                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Packet Forwarding Rate    | Whole-Device Performance: 4.17 Mpps<br>Port Performance: 2.68 Mpps                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Internal Cache            | 4 Mbits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Software Function         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Long Range                | Ports 1 to 8: up to 300 m.<br>Long range performance may vary depend on camera model or cable condition.                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| HPP                       | Support one-click activation and remote management via Hik-Partner Pro. Functions supported:<br><ol style="list-style-type: none"> <li>1. Display the port rate.</li> <li>2. Display the port bandwidth utilization rate.</li> <li>3. Display the PoE power usage.</li> <li>4. Display topology information.</li> <li>5. Display the alarm status.</li> <li>6. Restart ports and devices.</li> <li>7. Enable port long-range mode.</li> <li>8. Remotely upgrade the device.</li> </ol>                                                     |
| System Maintenance        | Support device management via web.<br>Support DHCP Client. Enabled by default for dynamic assignment of management IP addresses.<br>Support Super IP, which is a fixed IP address (10.180.190.200) for direct access.<br>Support management via Hik-Central Pro.<br>Support remote management via Hik-Partner Pro.<br>Support cable detection. Abnormal open circuits and short circuits as well as network cable length can be detected.<br>Support 802.1ab LLDP for peer device discovery.<br>Support port mirroring for fault locating. |


|                         |                                                                                                                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port Isolation          | Ports 1 to 8: port isolation mode to improve network security<br>Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.   |
| PoE Watchdog            | Ports 1 to 8: auto detect and restart the cameras that do not respond.                                                                                                                              |
| Loop Prevention         | Loop prevention is used to prevent the switching network from forming loops, which will seriously affect network communication. Disabled by default.<br>Support 802.1D STP.<br>Support 802.1w RSTP. |
| VLAN                    | VLAN is used for network scale planning and network health improvement.<br>Support 802.1Q.<br>Configurable VLAN ID from 1-4094.<br>Support Trunk, Access port mode.<br>Support Max. 4094 VLAN.      |
| <b>PoE Power Supply</b> |                                                                                                                                                                                                     |
| PoE Standard            | IEEE 802.3af, IEEE 802.3at                                                                                                                                                                          |
| PoE Power Pin           | 8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)                                                                                                                                                         |
| PoE Port                | PoE: Ports 1 to 8                                                                                                                                                                                   |
| Max. Port Power         | 30 W                                                                                                                                                                                                |
| PoE Power Budget        | 80 W                                                                                                                                                                                                |
| <b>Approval</b>         |                                                                                                                                                                                                     |
| EMC                     | CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020)                                                         |
| Safety                  | CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition)), CE-LVD (EN 62368-1: 2014+A11: 2017)                                                                                                  |
| Chemistry               | CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)                                                                                                                       |

## ▪ Typical Application

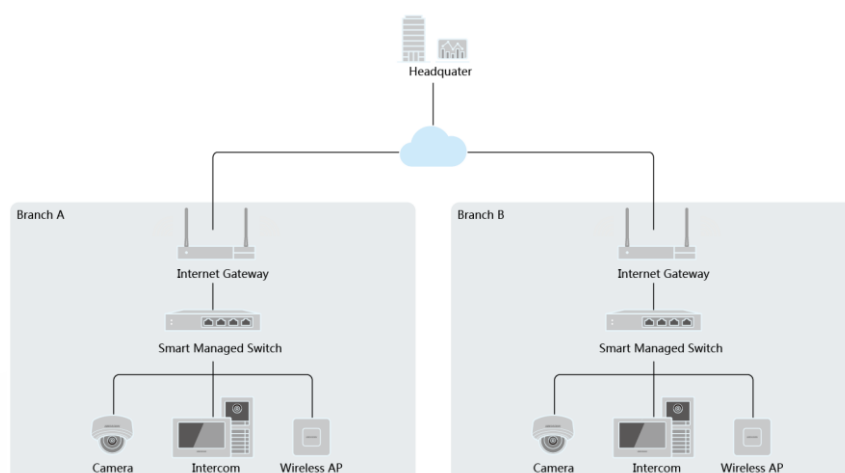


## Physical Interface

Front Panel

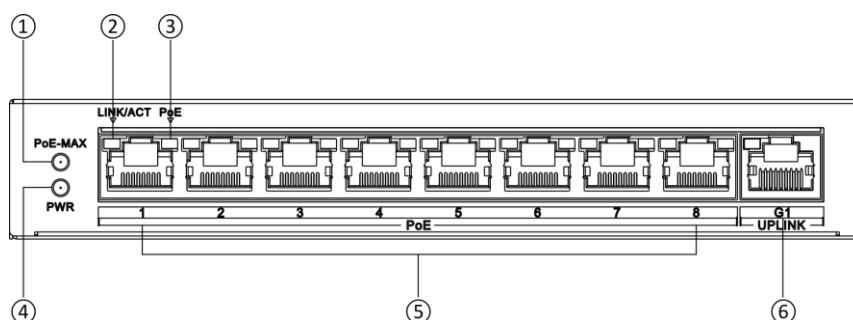


Rear Panel

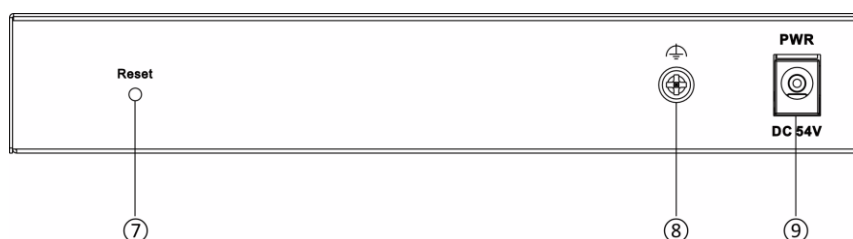

| No. | Indicator/Port             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ①   | PoE-MAX Indicator          | <ul style="list-style-type: none"> <li>● Solid on: The output power of the switch is about to reach or has reached the upper limit. The power supply may be abnormal if more devices are connected.</li> <li>● Unlit: The switch supplies power to a PD normally and its output power does not reach the upper limit.</li> </ul> <p>Note: The PoE-MAX indicator will be unlit in 5 seconds after the output power of the switch returns to normal.</p> |
| ②   | LINK/ACT Indicator         | <ul style="list-style-type: none"> <li>● Solid on: The port is connected.</li> <li>● Flashing: The port is transmitting data.</li> <li>● Unlit: The port is disconnected or connection is abnormal.</li> </ul>                                                                                                                                                                                                                                         |
| ③   | PoE Indicator              | <ul style="list-style-type: none"> <li>● Solid on: The switch supplies power to a PD normally.</li> <li>● Unlit: The switch is disconnected from a PD or power supply is abnormal.</li> </ul>                                                                                                                                                                                                                                                          |
| ④   | PWR Indicator              | <ul style="list-style-type: none"> <li>● Solid on: The switch is powered on normally.</li> <li>● Unlit: No power supply is connected or power supply is abnormal.</li> </ul>                                                                                                                                                                                                                                                                           |
| ⑤   | 10/100 Mbps PoE RJ45 Port  | Used for connection to a PD via a network cable.                                                                                                                                                                                                                                                                                                                                                                                                       |
| ⑥   | Gigabit RJ45 Port (Uplink) | Used for connection to another device via a network cable.                                                                                                                                                                                                                                                                                                                                                                                             |
| ⑦   | Reset Button               | Press and hold the reset button for about 5 seconds to restore all the configurations of the switch to default settings.                                                                                                                                                                                                                                                                                                                               |
| ⑧   | Grounding Terminal         | Used for connection to the grounding cable to protect the switch from lightning.                                                                                                                                                                                                                                                                                                                                                                       |
| ⑨   | Power Supply               | Use the attached power adapter and power cord to connect the switch to a socket.                                                                                                                                                                                                                                                                                                                                                                       |

## Dimension

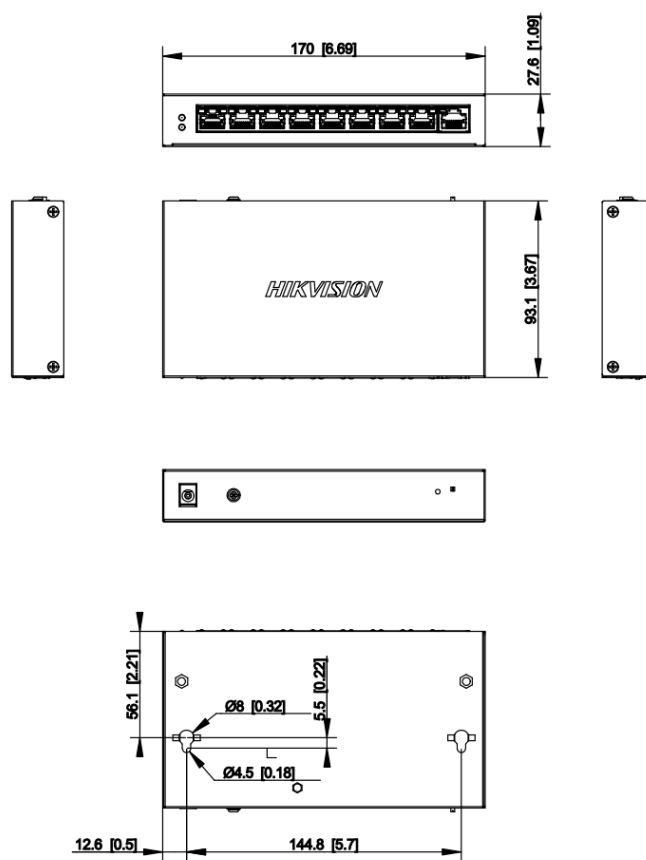

Unit: mm [inch]

|       |     |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

