

DH-PFB2110C-B

Ceiling Mount Bracket



- Built of aluminum alloy, it is cost-effective.
- Elegantly designed, it has internal wiring and is compatible with the lightweight bullet camera.



Screw Thread Type	1/4-20-UNC
Applicable Model	Please see Camera Accessories Selection
Packaging Dimensions	181 mm × 103 mm × 104 mm (7.13" × 4.06" × 4.09") (L × W × H)

Environment

Operating Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Operating Humidity	<90% (RH)
Storage Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Basic Protection *The products are designed for general use and are applicable even in areas with no specific requirements for anti-corrosion protection.

Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, and works in temperatures ranging from −40 °C to +60 °C (−40 °F to +140 °F) and in environments with a relative humidity of less than 90%. Avoid installation in environments with severe vibration.

Technical Specification

Structure

Casing Material	Aluminum alloy
Product Dimensions	Φ95.0 mm × 194.2 mm (Φ3.74" × 7.65")
Appearance Color	Black
Net Weight	0.12 kg (0.26 lb)
Gross Weight	0.24 kg (0.53 lb)
Load Bearing	1.0 kg (2.20 lb)
Installation	Ceiling mount
Adjustable Inclination Angle	0° to +90°
Rotation Angle	0° to +360°


Ordering Information

Type	Model	Description
Camera Mount	DH-PFB2110C-B	Ceiling Mount Bracket

Installation



Dimensions (mm[inch])

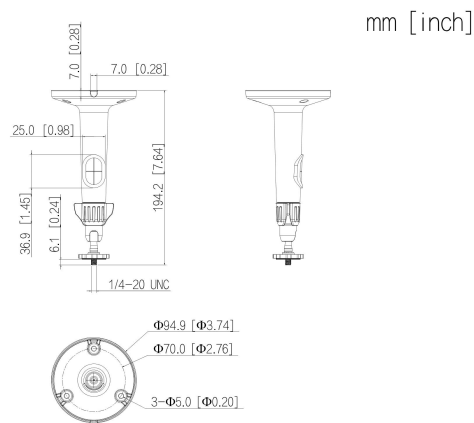

Package Information

- Ceiling mount bracket × 1
- ST4 × 25 screw × 3
- Plastic expansion tube × 3