


DS-2XE2707CB-M12(316L)

316L Explosion Proof Control Box with Built-in

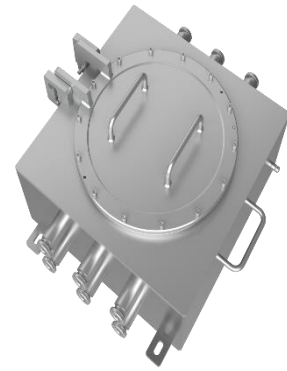

Key Feature

- Stainless steel 316L with anti-corrosion surface spray treatment
- 12 cable outlets
- ATEX and IECEx certified explosion-proof performance
- Ingress protection, IP68
- Purchase certified cable glands sealed with setting compound for cable routing if using electronic devices inside.

Specification

Model	DS-2XE2707CB-M12(316L)
Power	Rated input: AC 100 ~ 240V Rated output : DC 12V / 2A
Material	stainless steel 316L
Dimension	Overall Dimension: 534.0 mm × 506.2 mm × 236.5 mm (21.02" × 19.93" × 9.3"), Internal Dimension: 400.0 mm × 400.0 mm × 165.0 mm (15.75" × 15.75" × 6.5"), with 1 power adapter
Package Dimension	642 mm × 642 mm × 340 mm (25.28" × 25.28" × 13.39")
Weight	Approx. 54.5 kg (120.2 lb.)
Startup and Operating Conditions	-40 ° C to 60 ° C (-40 ° F to 140 ° F). Humidity 95% or less (non-condensing)
Protection	IP66: IEC 60529-2013, IP68: IEC 60529-2013
Explosion-Proof Protection	Ex db II C T6 Gb/Ex tb IIIC T80° C Db

Available Model

DS-2XE2707CB-M12(316L)

Dimension

