

DHI-HY-BC41I

Isolation Base



- Reliable communication: Completes EMC test, it has strong anti-electromagnetic interference ability, high stability and reliability
- Flexible installation: Non-loosening screws on base terminal for easy installation
- High endurance: Contacts material is highly acid-resistant and rust-resistant


System Overview

DHI-HY-BC41I Isolation Base is a mated product of Addressable Manual Call Point. When installed in addressable MCP, the isolation base automatically isolates short-circuited device, ensuring the normal operation of other devices in the circuit.

Scene

It is suitable for residential and industrial buildings such as hotels, shopping malls, hospitals, office buildings, schools, banks, libraries, factories, and warehouses.

Dimensions (mm/inch)

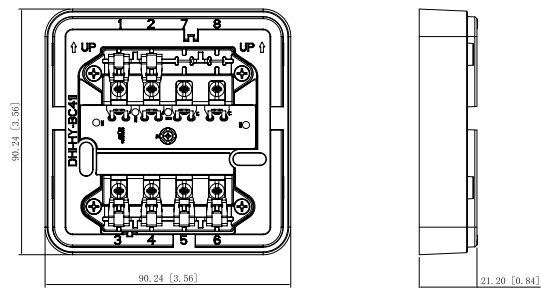

Technical specification

Compatible Model	Addressable Manual Call Point
Working Voltage	DC 16V-28V
Dimensions	90.24 mm×90.24 mm×21.2 mm (3.56" × 3.56" × 0.84")
Weight	62.8 g (0.138 lb)
Installation	Wall mount
Color	Red
Operating Temperature	−10°C to +50°C (+14°F to +122°F)
Storage Temperature	−20°C to +65°C (−4°F to +149°F)
Operating Humidity	≤ 95% RH (no condensation)

Ordering Information

Type	Model	Description
Isolation Base	DHI-HY-BC41I	Isolation Base