

DHI-ITSZJ-6101-S

Integrative tripod



Series Overview

The ITS Tripod seamlessly integrates with the speed-measuring system and illuminator, delivering stability and reliability through its reinforced triangular structure. It offers adjustable height and a PTZ mechanism with 360° pan, and an instant-lock function. Easy to use, it is suitable for a wide range of traffic-enforcement scenarios.

Technical Specification

Basic

Color	Black
Supported Devices	Spotter Mobile, Illuminator, etc

General


Material	Aluminum alloy
Support Plates	2 × 3/8" English screw thread
PTZ Port	2 × 1/4" British Standard Whitworth (BSW) threads; The bottom of the PTZ uses 3/8" British Standard Whitworth (BSW) threads.
PTZ Adjustment Range	Horizontal: Adjusts to 360° Elevation: Adjusts to 180°
PTZ Load Bearing	20 kg (44.09 lb)
Tripod Load Bearing	35 kg (77.16 lb)
Tripod Adjustment Range	Min: 802 mm (31.97"); Max: 1818 mm (71.57")
Product Dimensions	150 mm × 190 mm × 710 mm (5.91" × 7.48" × 27.95")
Bag Dimensions	180 mm × 230 mm × 830 mm (7.09" × 9.06" × 32.68")
Package Dimensions	250 mm × 250 mm × 850 mm (9.84" × 9.84" × 33.46")
Operating Temperature	−40 °C to +80 °C (−40 °F to +176 °F)
Storage Temperature	−40 °C to +80 °C (−40 °F to +176 °F)
Operating Humidity	0-100%
Storage Humidity	0-100%
Net Weight	5.8 kg (12.79 lb)
Gross Weight	7 kg ± 0.5 kg (15.43 lb ± 1.10 lb)

- Compatible with Spotter Mobile and various types of illuminators.

Ordering Information

Type	Model	Description
Integrative tripod	DHI-ITSZJ-6101-S	Integrative tripod

Installation

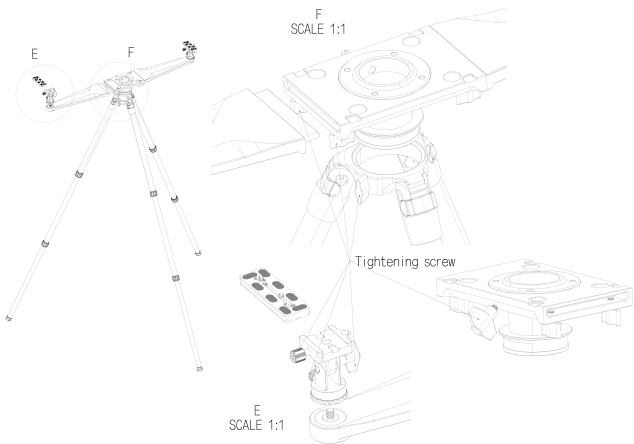

Dimensions (mm[inch])

