

DS-D5022F2-1V2S
21.5 inch FHD 100Hz VA Monitor with Speaker



- 100 Hz refresh rate, more fluid and life-like video
- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- Low blue light design for eye care.
- Multiple interfaces, including VGA, HDMI, audio out, and built-in speaker.
- Support VESA wall mount.


▪ Specification

Display	
Screen Size	21.5 inch, 54.48 cm
Active Display Area	478.65 mm (H) × 260.28 mm (V), 12.45 dm ²
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.241 mm (H) × 0.241 mm (V)
Brightness	250 cd/m ²
Viewing Angle	178° (H) / 178° (V)
Color Depth	8 bit 16.7 M
Contrast Ratio	3000 : 1
Response Time	8 ms
Refresh Rate	100 Hz
Haze	Haze 25%, 3H
Reliability	7 × 24 H
Color Gamut	72% NTSC
Interface	
Video & Audio Input	HDMI 1.4 × 1, VGA × 1, Audio In × 1
Video & Audio Output	Speaker × 2 (4Ω 2W)
Data Transmission Interface	None
Control Interface	None
Working Environment	
Working Temperature	0°C to 40 °C (32 °F to 104 °F)
Working Humidity	20% to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% to 90% RH (Non-Condensing)
General	
Power Supply	DC 12V , 2A
Power Consumption	≤ 24 W
Network Standby Power Consumption	≤ 0.5 W
Standby Time	600s
Casing Material	Plastic
Bezel Width	2.38 mm (top/left/right), 21.55 mm (bottom)
VESA	75 mm × 75 mm (4 - M4 × 6 mm)
Product Dimensions (W × H × D)	With base: 493.26 (W) mm × 393.45 (H) mm × 185.74 (D) mm (19.42 (W) × 15.49 (H) × 7.31 (D)) inch Without base: 493.26 (W) mm × 290.13 (H) mm × 42.35 (D) mm (19.42 (W) × 11.42 (H) × 1.67 (D)) inch
Package Dimensions (W × H × D)	599 (W) mm × 393 (H) mm × 109 (D) mm
Net Weight	2.0 ± 0.5 kg
Gross Weight	3.2 ± 0.5 kg
Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1


Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information
---------	---

▪ Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
Audio In	3.5mm audio input interface	DC	DC 12V 2.0A input interface

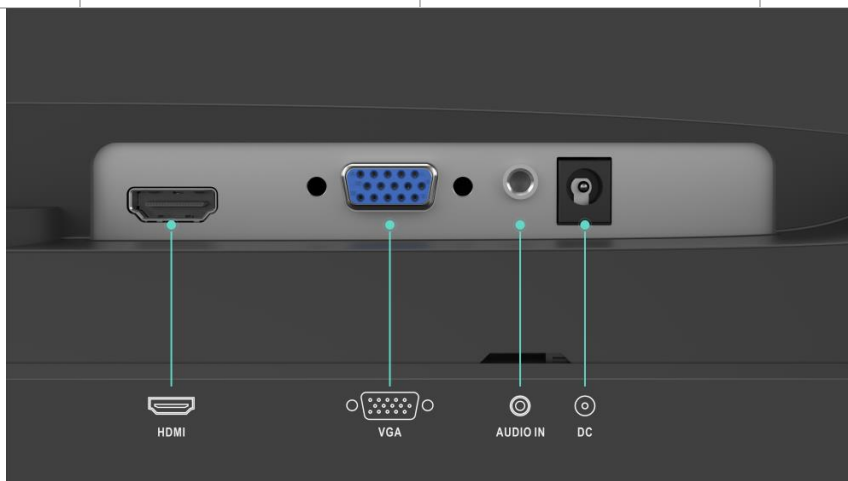

▪ Dimension



DP-D501940-1X1-Q 1-NW-Q0.1-TY/V20 0	DS-DM1940W
	

See Far, Go Further



www.hikvision.com
support@hikvision.com

