

DS-3WR60X **AX6000 Wireless Router**



- 6000Mbps Wi-Fi 6
- Wired Wireless Dual Gigabit
- Hikvision Mesh Support
- Roaming Support
- APP Management

▪ Specification


General	
Product Dimensions (W × H × D)	255 mm × 175.85 mm × 203.43 mm
Package Dimensions (W × H × D)	386 mm x 458 mm x 81 mm
Net Weight	0.89kg
Packing List	6000Mbps Wi-Fi6 Router x 1 Power Supply Adaptor x 1 CAT5e Network Cable x 1 Quick Start Guide x 1 Regulatory Compliance and Safety Information x 1
Packing Method	Single pack
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% to 90% RH non-condensing
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Storage Humidity	5% to 95% RH non-condensing
Installation Mode	Desk-Mounted, Wall-Mounted
Max. Power Consumption	< 22.5 W
Gross Weight	1.69kg
Wireless Parameter	
Wireless Standard	IEEE 802.11a/n/ac/ax @5GHz IEEE 802.11b/g/n/ax @2.4GHz
Working Frequency Band	2.4 GHz , 5 GHz
Transmitting Power	CE: < 20dBm(2.4GHz) < 23dBm(5GHz)
Receiving Sensitivity	5GHz -88dBm@HE80-MCS0 -60dBm@HE80-MCS11 2.4GHz -97dBm@HE20-MCS0 -66dBm@HE20-MCS11
Antenna	8 high gain antennas
Wireless Range	Up to 5167 ft ² /480 m ² (Recommend coverage for home use, actual Wi-Fi range varies depending on the layout and wall materials)
Max. Connections	256
Recommended Connections	64
Wireless Features	Dual Band Supported MU-MIMO supported Beamforming supported OFDMA supported
Antenna Gain	5dbi
Max. Wi-Fi Speed	≤ 5952 Mbps 5GHz: 4804 Mbps 2.4GHz: 1148 Mbps

Hardware Parameter	
Network Interface	1 × 10/100/1000 Mbps Adaptive WAN Port 3 × 10/100/1000 Mbps Adaptive LAN Ports
LED Indicator	Red/blue for different working states, flashing mode
Power Supply Method	Power Supply Adapter
Power Specifications	DC 12 V, 2 A
Button	Reset button, WPS/MESH Button
RAM	512MB DDR4
ROM	128MB SPI NAND FLASH
Software Function	
Security Mode	WPA2-PSK,WPA/WPA2-PSK,WPA2-PSK/WPA3-SAE
Security Mechanism	Support fast and secure WPS connection Support hiding wireless network name Support controlling terminal network connection Support firewalls Login Authentication
Management Method	Web Control: PC, mobile App Control: HPP, HC TR069(TR098/TR181)
DHCP	DHCP Client List DHCP Server
Upgrade	Web Upgarde App Cloud Upgrade Auto Upgrade
System Log	System log
Operating Mode	Router Mode Wireless Extender Mode Access Point Mode
WAN Mode	DHCP Static IP PPPOE
IP Version	IPv4 IPv6
Parental Control	Speed Limit Internet Access Period Filter URL Parental Control Custom Profiles
Firewall	Forbid UDP flood attack Forbid TCP SYNC flood attack Forbid ICMP flood attack
DDNS	Oray, No-IP,DynDNS
VPN	PPTP Server,L2TP Server,PPTP Client,L2TP Client,OpenVPN Server,OpenVPN Client
NAT Forwarding	Port Mapping DMZ UPnP

Others	VLAN/IPTV,IGMP,WAN Self-Adaption,Quick Diagnosis,WIFI Optimization,Ping/Tracert,Guest Wi-Fi
MESH	Hikvision Mesh
Roaming	802.11k/v

▪ Physical Interface

▪ Dimension

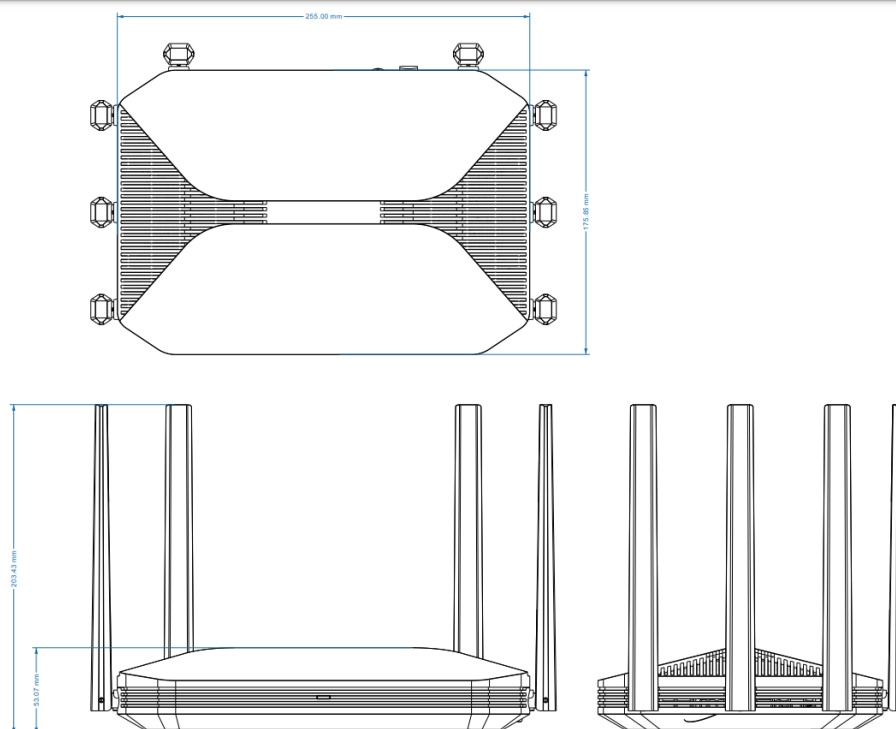

See Far, Go Further



www.hikvision.com
support@hikvision.com

