

## **AE-MW7601** **Audible and Visual Alarm**



- Aluminum alloy frame, the Audible and Visual alarm is lightweight, high strength, corrosion resistance, good airtightness, strong and durable
- Built-in 8Ω 5W speaker, the volume up to 110 dB (within 3.9'')
- Supports multiple alarm contents options, configure by RS485 interface
- Drop-proof, explosion-proof, dust-proof, waterproof, IP69K rating, good for vehicle exterior scenario


## Specification

| AE-MW7601 Audible and Visual Alarm |                           |                                        |
|------------------------------------|---------------------------|----------------------------------------|
| Parameters                         | Material                  | Aluminum alloy                         |
|                                    | Color                     | Black                                  |
|                                    | Power Input               | DC9V~36V                               |
|                                    | Operating Current         | 1A@DC12V                               |
|                                    | Speaker Power Consumption | 8Ω,5W                                  |
|                                    | Overall Power Consumption | ≤10W, static 20mA@24V                  |
|                                    | Volume                    | MAX 110 dB(within 3.9'')               |
|                                    | Control Interface         | RS485                                  |
|                                    | Interface Type            | 5-Pin aviation plug (female terminal)  |
|                                    | Program Control           | Alarm contents controlled by protocol  |
|                                    | Operating Temperature     | -20°C~70°C (-4°F~158°F)                |
|                                    | Dimension                 | 3.8''(L) × 1.7''(W) × 5.0''(H) ,±0.1'' |
|                                    | Protection Level          | IP69K                                  |

## Available Model

AE-MW7601 Audible and Visual Alarm


## Dimension

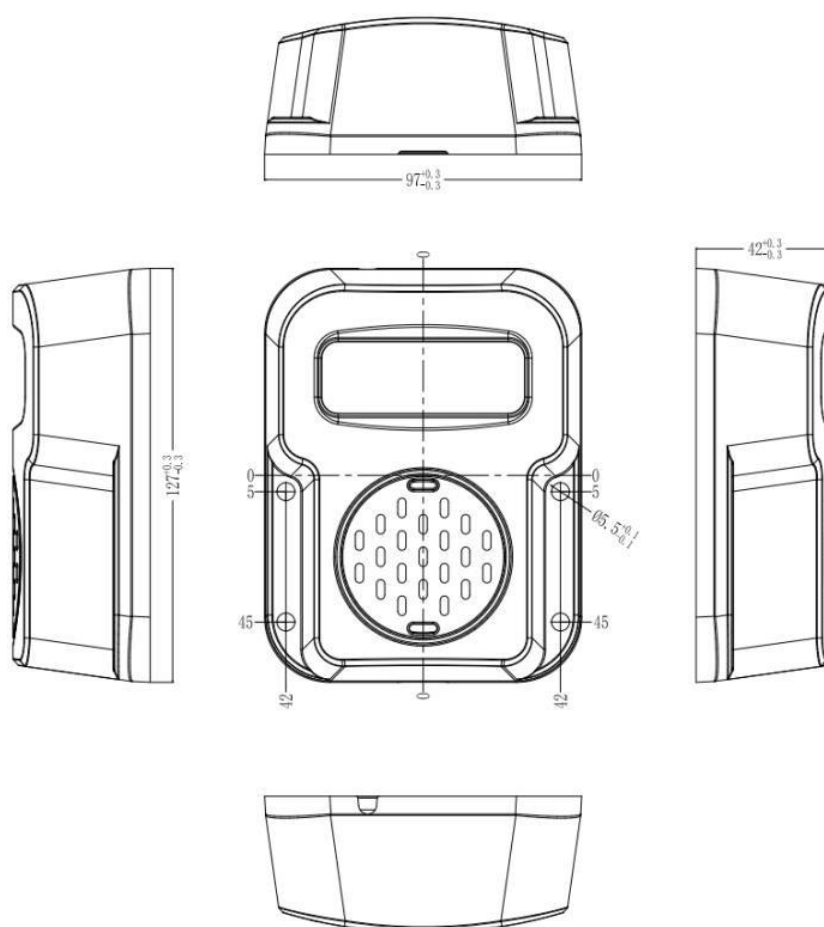

Unit: mm

## Interface


5-Pin aviation plug (female terminal), black integrated

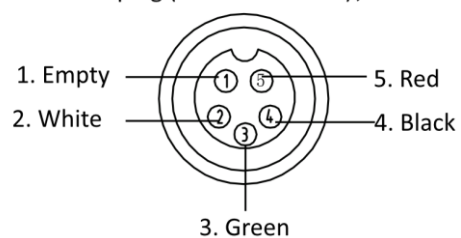

5-Pin Aviation Plug Front Panel

| Pin Sequence | Pin Color Signal | Signal |
|--------------|------------------|--------|
| 1            | Empty            | NC     |
| 2            | White            | 485-   |
| 3            | Green            | 485+   |
| 4            | Black            | GND    |
| 5            | Red              | Power  |

## Peripheral Connection

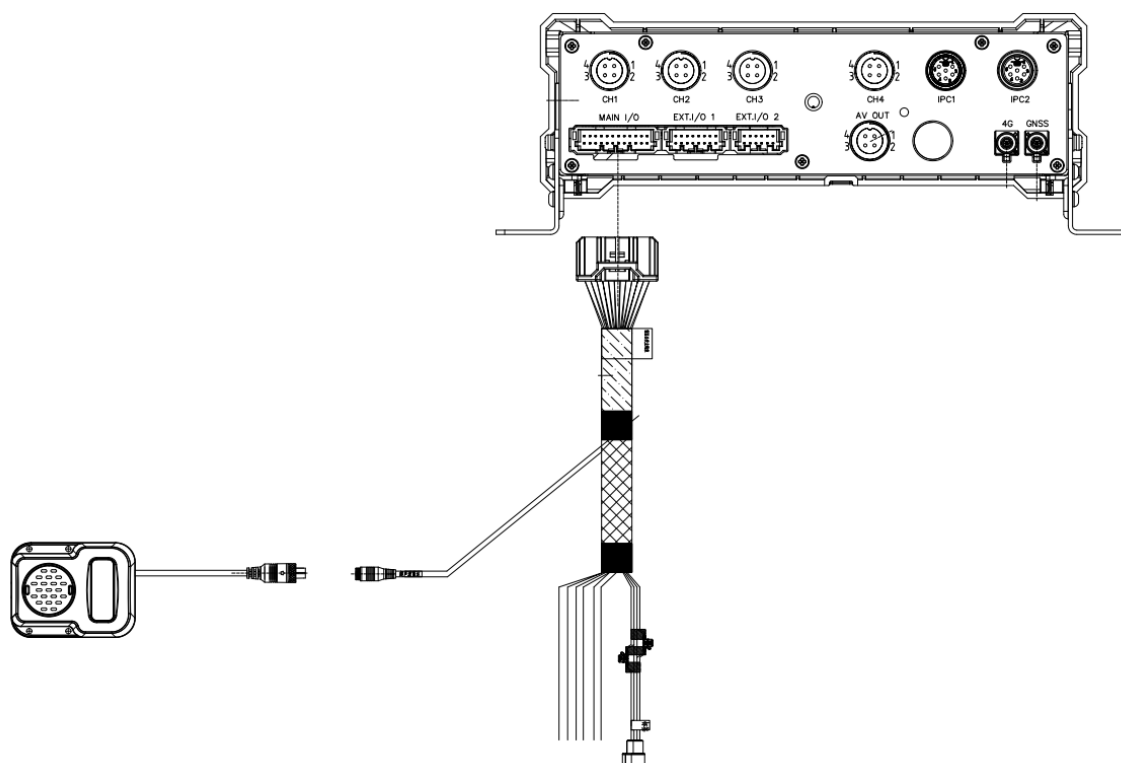

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.

